



SPECIAL

MODULATING Actuators

5.15

Application

The JOVENTA **SPECIAL** electric damper-actuator series is designed to operate air dampers in ventilation and air conditioning systems. The compact design and universal adapter fitted with limitation of rotation angle make this JOVENTA actuator highly versatile.

Key features

- DC0...10V or 0...20 mA control
- Load-independent running time
- Up to 5 actuators in parallel operation possible
- Plug-in terminal block connection
- Simple direct-mount with universal adapter on Ø 10 mm to 20 mm shaft or square shaft from 10 mm to 16 mm.
48 mm minimum damper shaft length
- Selectable direction of rotation
- Limitation of rotation angle
- Manual release button
- 2 adjustable auxiliary switches
See back page for settings
- Automatic shut-off at end position (overload switch)
- Energy saving at end positions
- Actuators available with 1 m halogen-free cable
- Customized versions available
- Devices meet CE requirements

Accessories

- ZK damper linkage selection
 - ZKG ball joints
- (see product sheet 6.10)

Nomenclature/Specification/Technical data

SM1.10	AC/DC24V	
SM1.10S	AC/DC24V	with 2 auxiliary switches
SM1.12	AC/DC24V	
SM1.12S	AC/DC24V	with 2 auxiliary switches
..... K		with 1 m halogen-free cable


Actuator		SM1.10(S)	SM1.12(S)
Torque		16 Nm	8 Nm
Damper area*		3.0 m ²	1.5 m ²
Running time		16 s	8 s
Supply voltage		AC/DC24V	AC/DC24V
Frequency		50-60 Hz	50-60 Hz
Power consumption			
- Running		6.0 W	6.0 W
- At end position		0.6 W	0.6 W
Dimensioning		15.0VA / 3.6A @ 2 ms	15.0VA / 3.6A @ 2 ms
Weight		1.1 kg	1.1 kg
Control signal	Y1	DC0...10V	
Control signal	Y2	0...20 mA	
Position signal	U	DC0...10V	
Angle of rotation / working range		90° (93° mech.)	
Angle of rotation / limitation		5°...85° in 5° < steps	
Service lifetime		60,000 rotations	
Auxiliary switches		3(1.5)A, AC24V	
Setting range / adjustable		5°...85° < infinity	
Noise level		45 dB (A)	
Protection class		II	
Degree of protection		IP 54 (cable downwards)	
Cable aperture connection		M16 x 1.5	
Mode of action		Type 1	
Ambient conditions			
- Operating temperature		-20...+50°C / IEC 721-3-3	
- Storage temperature		-30...+60°C / IEC 721-3-2	
- Humidity		5...95% r.F.	
Service		Maintenance-free	
Standards	Mechanics	EN 60 529 / EN 60 730-2-14	
	Electronics	EN 60 730-2-14	
	EMC Emissions	EN 50 081-1:92 / IEC 61 000-6-3:96	
	EMC Immunity	EN 50 082-2:95 / IEC 61 000-6-2:99	

SPECIAL


MODULATING Actuators

5.15


Wiring diagram




Parallel connections

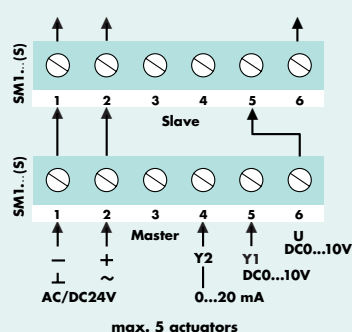


Position transmitter




Auxiliary switches (S)



Override control



Dimensions in mm


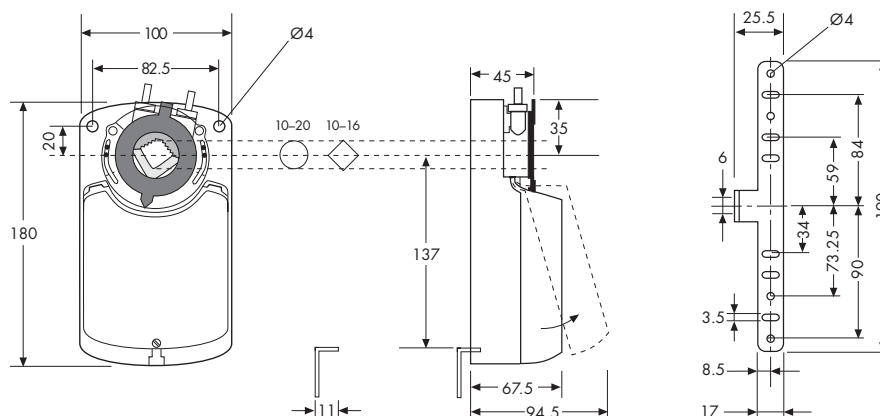


Setting the control signal

Control signal Y1 DC0...10V
Input resistance Ri 200 kΩ
Control signal Y2 0...20 mA
Input resistance Ri 388 Ω
Position signal U DC0...10V
Load resistance > 50 kΩ




By switching microswitch **d1** to ON position, the control signal Y1 or Y2 will be adapted to the chosen angle of rotation.

Micro-switch **d** for Y signals



Changing the direction of rotation

Micro-switch **c**



For more information see data sheet 5.50

Position transmitter

The SM1...(S) can also be controlled using the JOVENTA Positioner (PA/PF) with control signal of DC0...10V. For further information concerning the PA and PF positioner please refer to data sheet 6.20.


Caution: A maximum of 5 actuators can be controlled in parallel operation.

Setting the auxiliary switches

Factory setting:

Switch **a** at 10°
Switch **b** at 80°

The switching position can be manually changed to any required position by turning the ratchet.



Override control

The actuator SM1...(S) can be forced to override control when wired in accordance with the relevant diagram on the left.

Switch position:


- 1 = Actuator runs at 10 V
- 2 = Actuator runs at 0(2) V
- 3 = Automatic control

Rotation angle

The limitation or rotation angle can be set in 5° steps by moving the adapter.

The adapter can be removed simply by pressing the adapter clip on the underside of the actuator.

Limitation of rotation angle



Adapter release

