



IFH-3

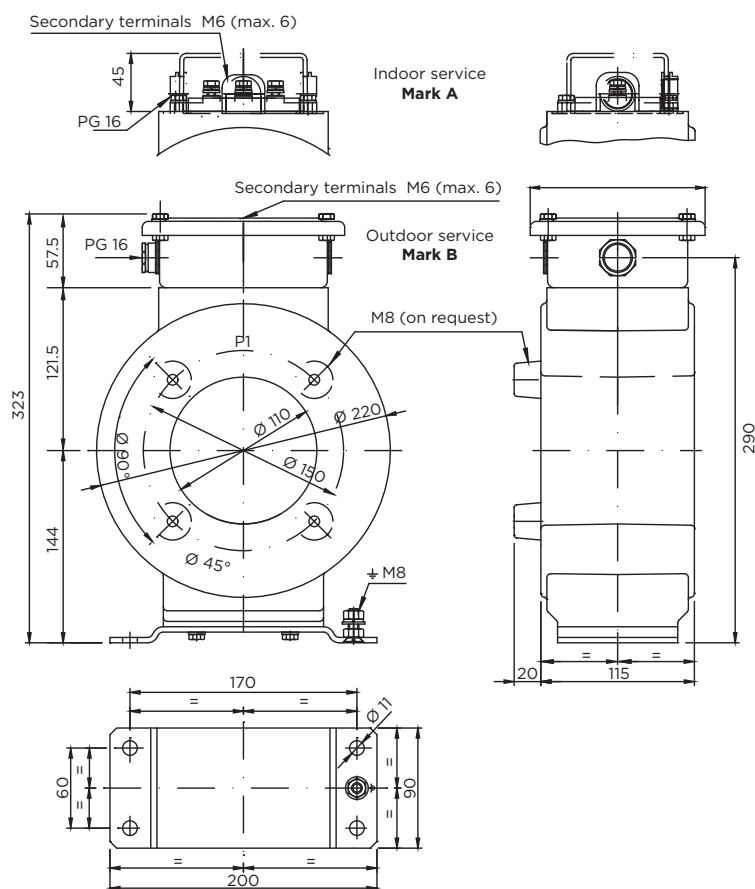

CHARACTERISTICS

	ONE SECONDARY		TWO SECONDARIES
Primary current A	METERING	PROTECTION	METERING + PROTECTION
150	5 VA CL1	5 VA 5P20	
200	15 VA CL1	5 VA 5P20	
250	5 VA CL0.5	10 VA 5P20	
300	12.5 VA CL0.5	10 VA 5P20	5 VA CL1 + 5 VA 5P20
350	20 VA CL0.5	12.5 VA 5P20	5 VA CL0.5 + 5 VA 5P20
400	20 VA CL0.5	15 VA 5P20	5 VA CL0.5 + 7.5 VA 5P20
500	25 VA CL0.5	20 VA 5P20	10 VA CL0.5 + 10 VA 5P20
600	50 VA CL0.5	20 VA 5P20	12.5 VA CL0.5 + 12.5 VA 5P20
1,000	50 VA CL0.5	20 VA 5P20	
1,500	50 VA CL0.5	20 VA 5P20	30 VA CL0.5 + 30 VA 5P20
2,000	50 VA CL0.5	20 VA 5P20	
3,000	50 VA CL0.5	20 VA 5P20	30 VA CL0.5 + 30 VA 5P20


IFH-3

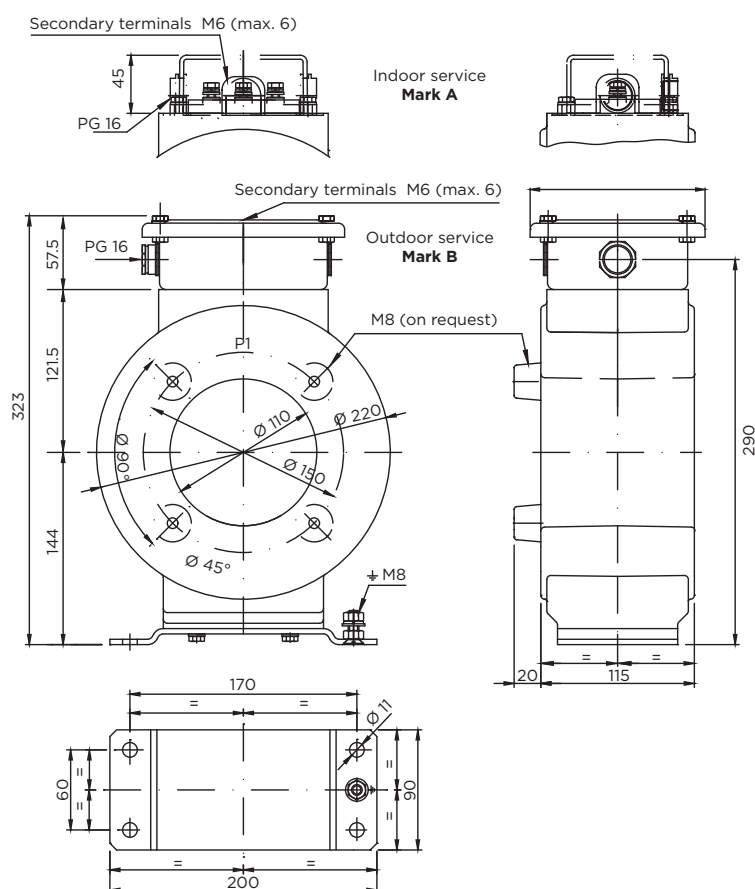

CHARACTERISTICS

Ratio A	Characteristics
10/1	Burden: 0.1 Oh. Error: at 0.05 In $\pm 15\%$ at In $\pm 10\%$ at 10 In $\pm 15\%$
20/1	Burden: 0.1 and 0.3 Oh. Error: at 0.05 In $\pm 15\%$ at In $\pm 10\%$ at 10 In $\pm 15\%$
30/1	Burden: 0.1 Oh. Error: at 0.05 In $\pm 15\%$ at In $\pm 10\%$ at 5 In $\pm 15\%$
50/1	Burden: 1 Oh. Error: at 0.05 In $\pm 15\%$ at In $\pm 10\%$ at 10 In $\pm 15\%$
60/1	Burden: 1 Oh. Error: at 0.05 In $\pm 15\%$ at In $\pm 10\%$ at 10 In $\pm 15\%$

ICO-3

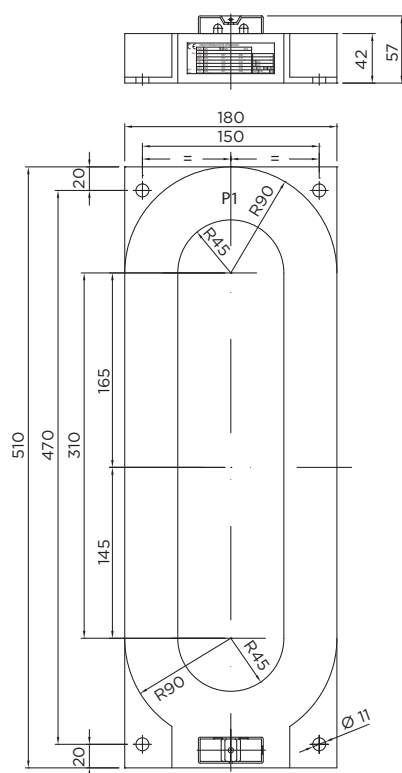

CHARACTERISTICS

Ratio A	Characteristics
20/1	Burden: 0.1 Oh. Error: at 0.01 In $\pm 15\%$ at 10 In $\pm 10\%$ at 10 In $\pm 15\%$
30/1	Burden: 0.1 Oh. Error: at 0.05 In $\pm 15\%$ at 10 In $\pm 10\%$ at 5 In $\pm 15\%$
50/1	Burden: 0.1 Oh. Error: at 0.05 In $\pm 15\%$ at 10 In $\pm 10\%$ at 10 In $\pm 15\%$
60/1	Burden: 0.1 Oh. Error: at 0.05 In $\pm 15\%$ at 10 In $\pm 10\%$ at 10 In $\pm 15\%$
100/1	Burden: 0.1 Oh. Error: at 0.05 In $\pm 15\%$ at 10 In $\pm 10\%$ at 10 In $\pm 15\%$

