


# LNL-1320 Series 3

## Dual Reader Interface Module

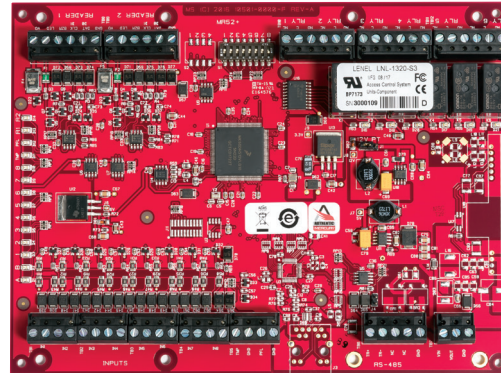

### Overview

LenelS2™ offers a Dual Reader Interface (DRI) module for access control solutions. Most access control card readers, keypads, or readers with keypads that use standard Wiegand Data1/Data0 or Clock/Data communication are supported, as are those that support the bidirectional RS-485 Open Supervised Device Protocol (OSDP™). Lock, unlock, and facility code offline access modes are supported on all readers connected to the DRI. Each DRI supports up to 16 different card formats as well as issue codes for both magnetic and Wiegand card formats.

The DRI provides a vital link between the Intelligent System Controller (ISC) and the card reader attached to the interface. As many as 32 DRI modules can be multidropped using RS-485 2-wire or 4-wire communication up to 4,000 feet per port away from the ISC. Each DRI module is individually addressed for increased reporting capabilities with OnGuard® access control software applications. The DRI includes eight inputs that support normally open, normally closed, supervised, and non-supervised circuits. In addition, six output relays support fail-safe or fail-secure operation.


### Features & Functionality

- 12 or 24 VDC power supply
- Supports Data1/Data0, Clock/Data, Supervised and Unsupervised F2F and OSDP-compatible RS-485 readers and keypads
- Supports Open Supervised Device Protocol (OSDP) readers, including biometric template transfer and Secure Channel encryption
- Downloadable firmware
- Six Form-C 5 A at 28 VDC relay outputs
- Up to 16 different formats
- Issue code support for magnetic and Wiegand formats
- Door contact supervision (open/closed)
- REX push-button monitor
- Strike control output
- Bicolor reader status LED support and 2-wire LED support
- Beeper control
- Dedicated tamper and power failure circuits
- Support for offline reader access mode
- On-board jumpers for termination
- On-board regulator allows 12 VDC reader support from 24 VDC power source
- DIP switch-selectable addressing
- Advanced Encryption Standard (AES) 128-bit algorithm for communications to ISC
- Supports Schlage® Handkey® template download
- Compatible with current and previous versions of OnGuard

### Extended Functionality

- Connect FIPS-201 readers for embedded authentication (when used with LNL-4420 and appropriate HID® and OnGuard software and licenses)

System Diagram

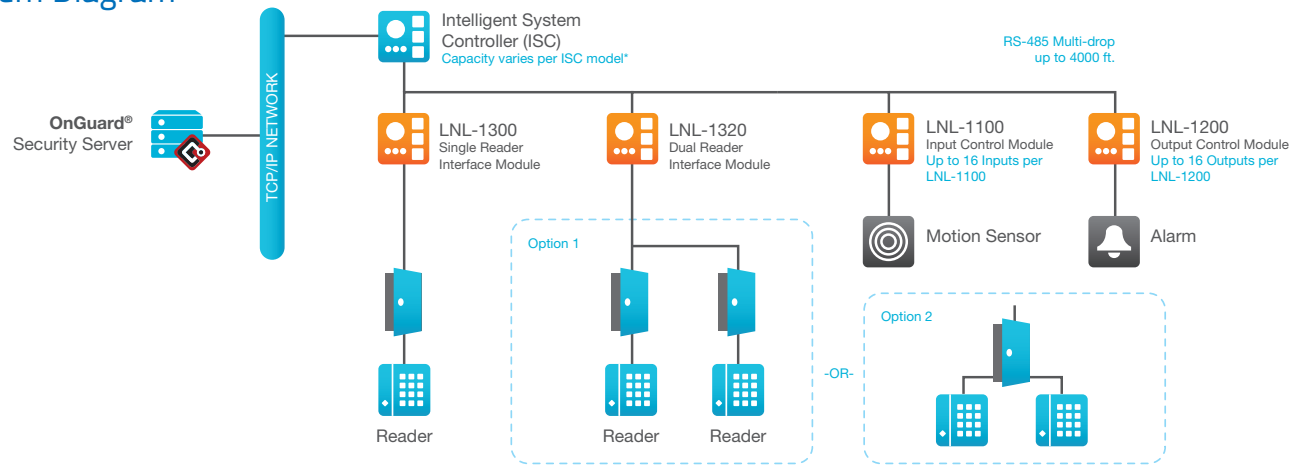

Power Supplies & Enclosures

|                   |  |
|-------------------|--|
| LNL-AL400ULX      | LenelS2 UL Listed 4A, 110VAC Power Supply – 12VDC 4A output, 115VAC input, continuous supply current with enclosure (15.5" x 12.5" x 4.5"), lock, tamper switch, UPS capable (Battery Optional) UL & CUL Approved                        |
| LNL-AL600ULX-4CB6 | LenelS2 UL Listed Power Supply – 12VDC 6A output, 115VAC (1.6 amps) input, continuous supply current with enclosure (24" x 18" x 4.5"), lock, tamper switch, power distribution module, UPS capable (Battery Optional) UL & CUL Approved |
| ABT-12            | Battery Kit - 12VDC, 12 AH battery (PS-12120)  |

Specifications

|                           |  |
|---------------------------|--|
| Primary Power             | 12 to 24Vdc ±10%, 550mA maximum (plus reader current)<br>12Vdc @ 550mA (plus reader current) maximum, 22.5 BTUs<br>24Vdc @ 330mA (plus reader current) maximum, 27.0 BTUs                                    |
| Outputs                   | 6 outputs, Form-C contacts: Normally Open (NO) Contact: 5A @ 30 Vdc, Normally Closed (NC) Contact: 3A @ 30 Vdc   |
| Inputs                    | 8 unsupervised/supervised, standard EOL: 1k/1k ohm, 1% 1/4 watt<br>2 unsupervised, dedicated for cabinet tamper and UPS fault monitoring   |
| Reader Interface          | Reader power: 12Vdc ±10% regulated, 300mA maximum each reader (jumper selectable and input voltage (VIN) must be 20Vdc minimum) or 12 to 24Vdc ±10% (input voltage passed through) 300mA maximum each reader |
| Reader Port Compatibility | Wiegand Data 1/Data 0<br>Magnetic Clock/Data<br>Supervised and Unsupervised F2F<br>Open Supervised Device Protocol   |
| Mechanical                | Dimension: 6" (152mm)W x 8" (203mm)L x 1" (25mm)H<br>Weight: 11 oz. (312g) nominal   |
| Environmental Temperature | Operating: 32°F to 158°F (0°C to +70°C)<br>Storage: -67°F to 185°F (-55°C to +85°C)  |
| Humidity                  | 5% to 95% RHNC   |
| Compliance Approvals      | FCC Part 15, CE, RoHS, UL 294, UL 1076, ULC CSA-C22.2, CAN/ULC-S319-05, cUL/ORD-C1076  |

