

EE210

Humidity and Temperature Sensor for Demanding Climate Control

The EE210 humidity (RH) and temperature (T) sensor is designed to meet the highest requirements in demanding climate control applications. Besides the accurate measurement of RH and T EE210 calculates various RH related parameters such as dew point temperature, absolute humidity and mixing ratio.

Outstanding Measurement Performance

Excellent performance of EE210 in polluted or aggressive environment is ensured by the encapsulated measurement electronics inside the sensing probe and the long-term stable E+E sensing element with proprietary coating.

Analogue, Digital Outputs and Display

All measured and calculated values are available on the BACnet MS/TP or Modbus RTU interface, two of them on the analogue voltage or current outputs, while up to three values can be shown simultaneously on the optional display.

Versatility

EE210 is available for wall or duct mount, with remote probe, as well as an outdoor version. The IP65/NEMA 4X enclosure minimizes installation costs and provides outstanding protection against contamination and condensation.

Easy Configuration and Adjustment

With an optional USB configuration adapter, the user can set the RS485 interface parameters, the output scaling and perform one or two point adjustment for RH and T.



Features

Appropriate for US mounting requirements

- » Knockout for 1/2" conduit fitting

External mounting holes

- » Mounting with closed cover
- » Electronics protected against construction site pollution
- » Easy and fast mounting

Electronics on the underside of the PCB

- » Optimum protection against mechanical damage during installation

Bayonet Screws

- » Open/closed with a 1/4 rotation

Cast Electronics

- » Mechanical protection
- » Condensation-resistant

E+E RH and T Sensing Element

- » Outstanding long-term stability
- » Protected solder pads
- » Tested according to automotive standard AEC-Q200

Display

- » Selectable display layout
- » Measurands freely selectable
- » Backlight optional

Smooth cover surface

- » No accumulation of dust in protruding edges

IP65 / NEMA 4X Enclosure

- » Type T13 compatible with radiation shield H010501

Watertight cable outlet


Inspection certificate
according DIN EN 10204-3.1



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BI.

Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends sensor life-time and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the sensors' long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface.

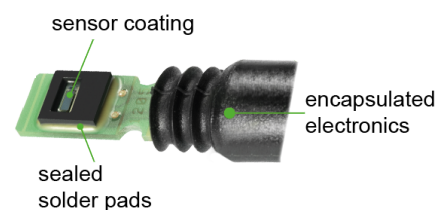

Technical Data

Measured Values

Relative Humidity (RH)

Working range 0...100 %RH

RH accuracy¹⁾ (incl. hysteresis, non-linearity and repeatability)

Type T1 (wall), T2 (duct):

-15...40 °C (5...104 °F)	≤90 %RH	±(1.3 + 0.003*measured value) %RH
-15...40 °C (5...104 °F)	>90 %RH	±2.3 %RH
-40...60 °C (-40...140 °F)		±(1.5 + 0.015*measured value) %RH

Type T3 (remote):

at 20 °C (68 °F) ±2.5 %RH


Type T13 (outdoor):

-15...40 °C (5...104 °F)	≤90 %RH	±(1.6 + 0.005*measured value) %RH
-15...40 °C (5...104 °F)	≥90 %RH	±3 %RH
-40...60 °C (0...140 °F)		±(2.3 + 0.008*measured value) %RH


Temperature (T)

T accuracy


Type T1, T2

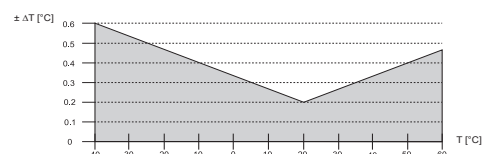

Type T3

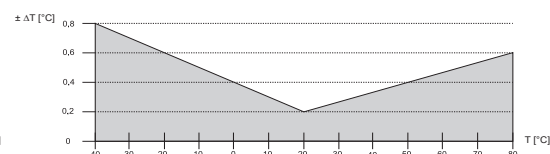

Type T13

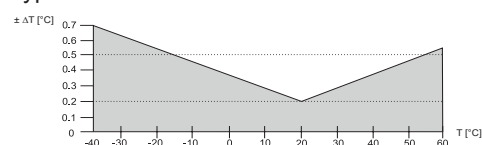

Calculated parameters




		from		up to		unit
Dew point temperature	Td	-40 (-40)		60 (140)		°C (°F)
Frost point temperature	Tf	-40 (-40)		0 (32)		°C (°F)
Wet bulb temperature	Tw	0 (32)		60 (140)		°C (°F)
Water vapour partial pressure	e	0 (0)		200 (3)		mbar (psi)
Mixing ratio	r	0 (0)		160 (1200)		g/kg (gr/lb)
Absolute humidity	dv	0 (0)		150 (60)		g/m³ (gr/ft³)
Specific enthalpy	h	-40 (-10)		500 (200)		kJ/kg (BTU/lb)

1) Traceable to intern. standards, administrated by NIST, PTB, BEV,... The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation). The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement). For Type T13: at 24 V DC and RL=250 for A6 versions.

Outputs

Analogue output	0 - 5 V / 0 - 10 V	-1 mA < I _L < 1 mA
	4 - 20 mA (2-wire) for Type T13	R _L ≤ 500 Ω 250 ≤ R _L ≤ 500 Ω recommended
Digital output	0 - 20 mA (3-wire)	R _L ≤ 500 Ω
	Default settings Modbus RTU	RS485 (BACnet MS/TP or Modbus RTU), EE210 = 1 unit load
	Default settings BACnet MS/TP	Baud rate according ordering guide, parity even, 1 stop bit, address 242 Baud rate according ordering guide, parity none, 1 stop bit, address 1

General

Power supply (Class III)  ²⁾ for 4 - 20 mA, 2-wire	10 V + R _L x 20 mA < V ₊ < 30 V DC for Type T13: 24 V DC ±10 % recommended		
for 0 - 20 mA, 3-wire for 0 - 5 V / 0 - 10 V / RS485	15 - 35 V DC or 24V AC ±20 %		
Current consumption at 24 V			
Voltage output	DC supply max. 12 mA; AC supply max. 34 mA _{rms} ;	with display max. 23 mA with display max. 49 mA _{rms}	
Current output			
2-wire	DC supply max. 40 mA;	with display max. 40 mA	
3-wire	DC supply typ. 33 mA; AC supply typ. 65 mA _{rms} ;	with display max. 44 mA with display max. 84 mA _{rms}	
Digital interface	DC supply typ. 5 mA; AC supply typ. 15 mA _{rms} ;	with display max. 20 mA with display max. 35 mA _{rms}	
Display ³⁾	Available for Type T1/T2/T3 1, 2 or 3 lines, user configurable Optional with backlight		
Electrical connection	Screw terminals, max. 1.5 mm ²		
Enclosure material	Polycarbonate, UL94 V-0 (with Display UL94HB) approved		
Protection rating	IP65 / NEMA 4X		
Cable gland	M16 x 1.5		
Probe cable (for PE210)	PVC, Ø 4.3 mm, 4 x 0.25 mm ² , Length: 1.5 or 3 m (4.9 or 9.8 ft)		
Electromagnetic compatibility	EN 61326-1 FCC Part15 Class A	EN 61326-2-3 ICES-003 Class A	Industrial Environment  
Temperature ranges	Working: -40...60 °C (-40...140 °F) (-40...80 °C / -40... 176 °F for probe PE210)		
Without display	Storage: -40...60 °C (-40...140 °F)		
Temperature ranges	Working: -20...50 °C (-4...122 °F) (-40...80 °C / -40... 176 °F for probe PE210)		
With display	Storage: -20...60 °C (-4...140 °F)		

2) USA & Canada: class 2 supply required, max. supply voltage 30 V DC


3) For display operation with EE210-M1xA6 (4 - 20 mA, 2-wire) both outputs must be connected



Dimensions


Values in mm (inch)

Type T1

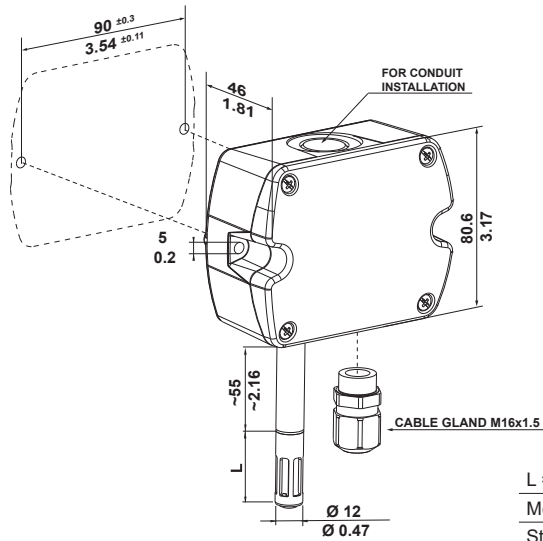


L = filter cap	mm (inch)
Membrane	34 (1.4)
Stainless steel	33 (1.3)
Metal grid	33 (1.3)


Type T2

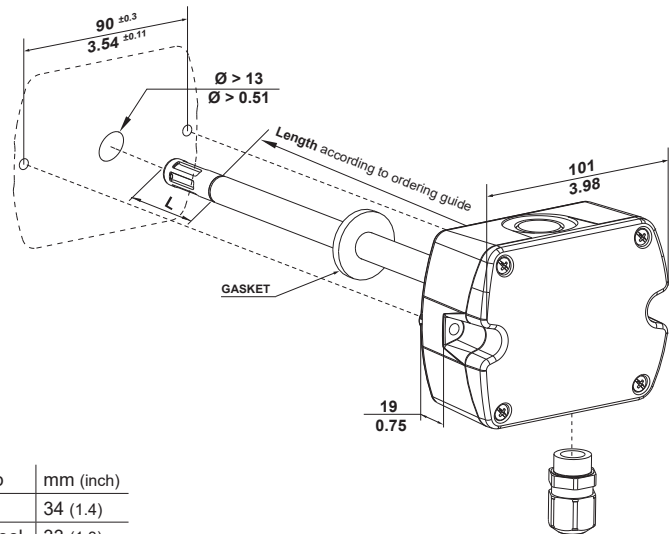

Type T3




PE210

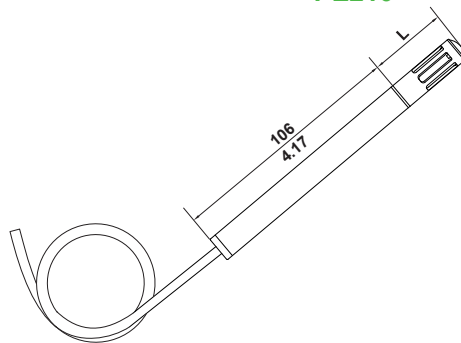


Mounting flange

in the scope of supply for
Type T2 and T3

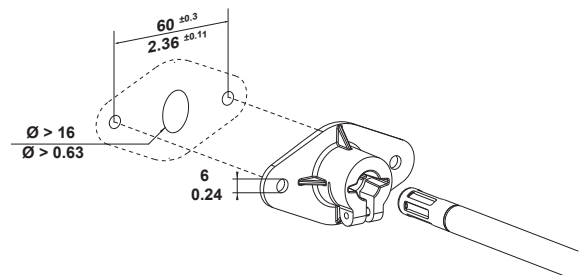


Type T13

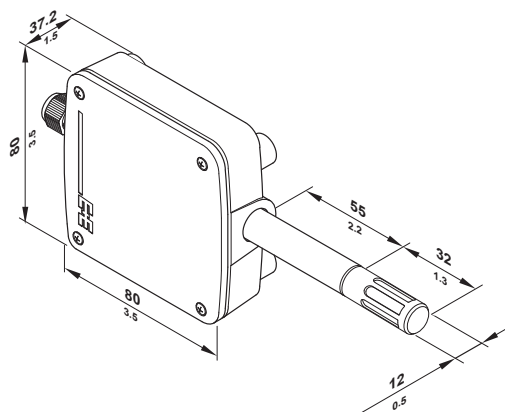

Radiation Shield HA010501 for Type T13

(needs to be ordered separately)

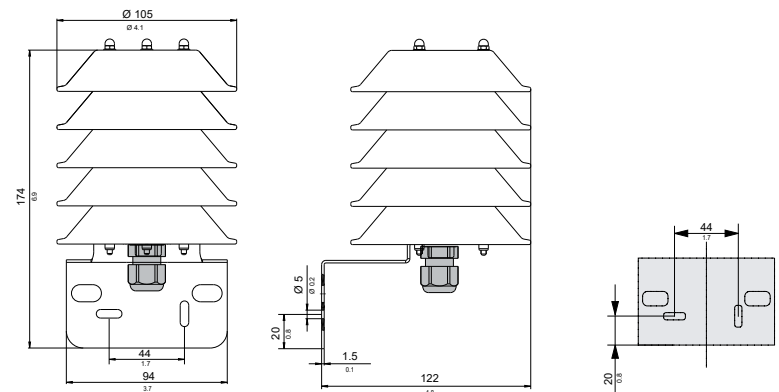

Ordering Guide

		EE210-			
Hardware Configuration	Model	RH + T			
	Type	Wall mount Duct mount Remote probe ¹⁾ Outdoor	T1	T2	T3
	Probe length	50 mm (2") 200 mm (4")		L50 L200	T13
	Output	0 - 5 V 0 - 10 V 0 - 20 mA (3-wire) 4 - 20 mA (2-wire) RS485		A2 A3 A5 A6 J3	A3 A6
	Filter	Membrane Metal grid Stainless steel sintered	F2 F3 F4	F2 F3 F4	F3
	Display ²⁾	No Display Without backlight ³⁾ With backlight ⁴⁾	no code D1 D2	no code D1 D2	no code D1 D2
Setup Analogue Outputs	Output 1	Relative humidity RH [%] Temperature T [°C] Temperature T [°F] Other measurand (xx see measurand code below)	no code MA1 MA2 MAxx		
	Scaling 1 low	0 Value	no code SALValue		
	Scaling 1 high	100 Value	no code SAHValue		
	Output 2	Temperature T [°C] Temperature T [°F] Other measurand (xx see measurand code below)	no code MB2 MBxx		
	Scaling 2 low	Value	SBLValue		
	Scaling 2 high	Value	SBHValue		
Setup RS485	Protocol	Modbus RTU ⁵⁾ BACnet MS/TP ⁶⁾	P1 P3		
	Baud rate	9600 19200 38400 57600 ⁷⁾ 76800 ⁷⁾ 115200 ⁷⁾	BD5 BD6 BD7 BD8 BD9 BD10		
	Units	Metric (SI) Non metric (US/GB)	no code U2		

1) The PE210 probe has to be ordered as separate position

2) Factory setup: For analogue output versions the display shows the measurands selected for output 1 and output 2.

For digital output versions the display shows RH and T.

3) Not with output A5

4) Not with output A6

5) Modbus Map and setup instructions: See User Guide and Modbus Application Note at

6) Product Implementation conformance Statement (PICS) available at

7) Only for BACnet

Measurand Code

For Output 1 and 2 in the Ordering Guide



Please note: no mix of SI/US units allowed

Measurand code		MAxx / MBxx
Relative humidity RH	[%]	10
Temperature T	[°C]	1
	[°F]	2
Dew point temperature Td	[°C]	52
	[°F]	53
Frost point temperature Tf	[°C]	65
	[°F]	66
Mixing ratio r	[g/kg]	60
	[gr/lb]	61

Measurand code		MAxx / MBxx
Absolute humidity dv	[g/m³]	56
	[gr/ft³]	57
Wet bulb temperature Tw	[°C]	54
	[°F]	55
Water vapor partial pressure e	[mbar]	50
	[psi]	51
Specific enthalpy h	[kJ/kg]	62
	[BTU/lb]	64

Ordering Guide PE210

			PE210-
HW Config.	Model	RH + T	M1
	Filter	Membrane	F2
		Metal grid	F3
		Stainless steel sintered	F4
	Cable length	1.5 m	KL150
		3 m	KL300

Order Examples

Type T1 and T2

EE210-M1T1A3F2D2SBL-40SBH60

Model: RH + T
 Type: Wall mount
 Output: 0 - 10 V
 Filter: Membrane
 Display: With backlight
 Output 1: Relative humidity
 Scaling 1: Low: 0 %RH
 High: 100 %RH
 Output 2: Temperature [°C]
 Scaling 2: Low: -40 °C
 High: 60 °C

Type T3

Position 1: Basic Device

EE210-M1T3A6MB52SBL-10SBH50

Model: RH + T
 Type: Remote probe
 Output: 4 - 20 mA
 Filter: Without
 Display: Without
 Output 1: Relative humidity
 Scaling 1: Low: 0 %RH
 High: 100 %RH
 Output 2: Dew Point Temperature [°C]
 Scaling 2: Low: -10 °C
 High: 50 °C

Position 2: Remote Probe

PE210-M1F3KL150

Model: RH + T
 Filter: Metal grid
 Cable length: 1.5 m

Type T13

Position 1:

EE210-M1T13A6F3SBL-40SBH60

Model: RH + T
 Type: Outdoor
 Output: 4 - 20 mA
 Filter: Metal grid
 Display: Without
 Output 1: Relative humidity
 Scaling 1: Low: 0 %RH
 High: 100 %RH
 Output 2: Temperature [°C]
 Scaling 2: Low: -40 °C
 High: 60 °C

Position 2:

HA010501

Radiation shield for EE210 Outdoor



YOUR PARTNER IN SENSOR TECHNOLOGY

ELEKTRONIK®
SINCE 1974

Accessories

USB configuration adapter	HA011066
Product configuration software	EE-PCS
Radiation shield for EE210 Outdoor (Type T13)	HA010501
Power supply adapter	V03
Protection cap for 12 mm probe	HA010783