


## Accessories: Accumulator adapter BSP thread (dimensions in mm [inch])

Accumulator adapter for Type 0352VAW32..., max. operating pressure 330 bar [4800 psi]

Type: S307V/G1 1/4-DN32 and  
S309V/G2-DN32



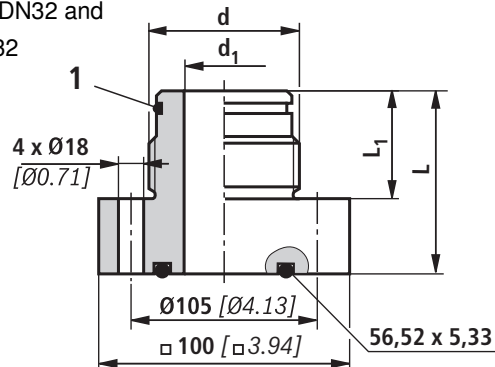

Scope of delivery comprises 4 hexagon socket head cap screws **ISO 4762 - M16 x 45 - 10.9**

1) For more information on the accumulator adapter Type S307 and S309 please refer to AB22-18

1 Seal ring, see table

Short designation	Accumulator adapter <sup>1)</sup>	Material no.	d	d <sub>1</sub>	L	L <sub>1</sub>	Seal ring
S307	S307V/G1 1/4-DN32	R900085303	G1 1/4	20	67	37	Ø30.00 x 3.00
S309	S309V/G2-DN32	R900545858	G 2	32	73	43	Ø48.00 x 3.00

## Accessories: Pressure relief valve

Set pressure of the pressure relief valve in bar [psi]	Adjustment type at the pressure relief valve		Maximum securable delivery volume l/min [gpm]	Material no. (Seal material FKM)
	Hand wheel	Spindle with protective cap		
50 [730]			40 [10.56]	0532004200
70 [1015]			50 [13.20]	0532004201
100 [1450]			100 [26.40]	0532004202
120 [1740]			100 [26.40]	0532004211
140 [2030]			100 [26.40]	0532004203
160 [2320]			100 [26.40]	0532004204
200 [3480]			100 [26.40]	0532004209
211 [3060]			100 [26.40]	0532004205
250 [3625]			130 [34.32]	0532004206
280 [4060]			130 [34.32]	0532004210
300 [4350]			130 [34.32]	0532004207
330 [4800]			150 [39.60]	0532004208
50 [730]			40 [10.56]	0532004102
70 [1015]			50 [13.20]	0532004103
80 [1160]			60 [15.84]	0532004111
100 [1450]			100 [26.40]	0532004104
120 [1740]			100 [26.40]	0532004114
140 [2030]			100 [26.40]	0532004107
160 [2320]			100 [26.40]	0532004105
180 [2610]			100 [26.40]	0532004113
200 [3480]			100 [26.40]	0532004110
211 [3060]			100 [26.40]	0532004100
250 [3625]			130 [34.32]	0532004106
260 [3770]			130 [34.32]	0532004115
280 [4060]			130 [34.32]	0532004112
300 [4350]			130 [34.32]	0532004101
330 [4800]			150 [39.60]	0532004108