


ELETTROVENTILATORI CENTRIFUGHI A QUADRUPLA ASPIRAZIONE, SERIE EP-DAD



Elettroventilatori centrifughi a quadrupla aspirazione in acciaio verniciato e boccaglio con rete di protezione. Adatti a convogliare aria pulita con temperatura max di 60°C

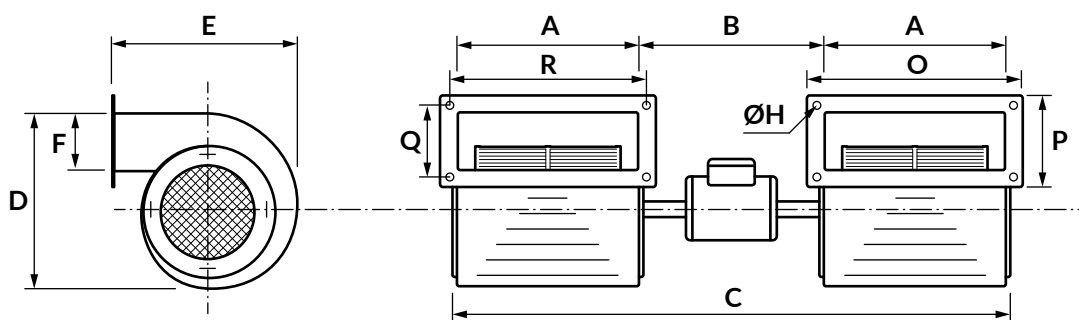

codice	A	B	C	D	E	F	H	O	P	Q	R
EPDAD108	200	180	580	170	185	63	8	240	115	95	220
EPDAD133	200	320	720	201	208	90	9	240	135	115	220
EPDAD146	200	320	720	248	252	90	9	240	135	115	220
EPDAD160M	200	360	760	300	293	113	9	250	160	140	230
EPDAD160S	200	360	760	300	293	113	9	250	160	140	230
EPDAD200/4	280	290	850	373	333	135	9	330	190	165	305
EPDAD200/6	280	290	850	373	333	135	9	330	190	165	305
EPDAD240/4	320	340	980	438	400	173	10	385	233	205	355
EPDAD240/6	320	290	930	438	400	173	10	385	233	205	355
EPDAD280/4	400	355	1155	513	465	193	10	465	254	224	435
EPDAD280/6	400	340	1140	513	465	193	10	465	254	224	435

modello	rpm 2800					rpm 1400					rpm 900				
	Hp.	W.	Portata m³/h		Pressione max mm H²O	Hp.	W.	Portata m³/h		Pressione max mm H²O	Hp.	W.	Portata m³/h		Pressione max mm H²O
			min.	max.				min.	max.				min.	max.	
EPDAD108	0,33	243	550	1250	18	-	-	-	-	-	-	-	-	-	-
EPDAD133	0,5	368	850	2000	26	-	-	-	-	-	-	-	-	-	-
EPDAD146	0,75	552	1100	2600	46	-	-	-	-	-	-	-	-	-	-
EPDAD160M	2	1472	1800	4400	65	0,75	552	900	2400	15	-	-	-	-	-
EPDAD160S	3	2208	2400	5500	90	1	736	1250	2750	24	-	-	-	-	-
EPDAD200/4	-	-	-	-	-	1,5	1104	2000	5000	34	-	-	-	-	-
EPDAD200/6	-	-	-	-	-	-	-	-	-	-	0,75	552	1200	3200	15
EPDAD240/4	-	-	-	-	-	3	2208	3200	8200	46	-	-	-	-	-
EPDAD240/6	-	-	-	-	-	-	-	-	-	-	1	736	2000	5250	20
EPDAD280/4	-	-	-	-	-	5,5	4048	7500	16000	61	-	-	-	-	-
EPDAD280/6	-	-	-	-	-	-	-	-	-	-	2	1472	4200	10500	24

N.B. in caso di ordine, specificare la polarità del ventilatore