

SINGLE POLE DIST. BLOCK, 150 A UL/CSA, CABLE LINE, 7 CABLES LOAD, COPPER

CATALOG NUMBER

UDJ-125A



CERTIFICATIONS



FEATURES

Tinned copper or aluminum block allows for copper or aluminum conductor direct connections, or using ferrule

Screw retaining cover is hinged and removable

Design allows for visual inspection of conductor and confirmation of connection

Modular snap-together blocks for building multi-pole power blocks

Easily clips onto DIN rail or mounts to panel with screws

95% fill ratio

RoHS compliant

Conforms to EN 45545 obtaining an HL3 classification for chapter R23 and HL2 classification for chapter R22

Halogen free

PRODUCT ATTRIBUTES

Article Number: 569020

Finish: Tinned

Max Current Rating, IEC: 125 A

Max Current Rating, UL/CSA: 150 A

Line Side Connection: Cable

Load Side Connection: 7 Cables

Material: Copper;Thermoplastic

Line Side Max Conductor Size, IEC: 35 mm²

Load Side Max Conductor Size, IEC: 16 mm²

Max Working Voltage, IEC (Ui): 1,000 VAC/DC

Max Working Voltage, UL (Vin): 600 V

Short Term Withstand Current (Icw) 1s: 4.2 kA

Peak Short Circuit Current (Ipk): 30 kA

Rated Conditional Short-Circuit Current (Icc): 15 kA

Short Circuit Current Rating (SCCR): 100 kA

Line Side Number of Connections: 1

Line Side Compact Stranded Wire Size: 10 - 35 mm²

Line Side Wire Size: #8 – 1/0

Load Side Number of Connections: 7

Load Side Compact Stranded Wire Size: (1) 6 - 16 mm²;(6) 2,5 - 16 mm²

Load Side Stranded Wire Size - Ferrule: (1) 6 - 16 mm²;(4) 2,5 - 16 mm²

Load Side Wire Size: (1) #14 - #2 Stranded or #14 - #10 Solid;(6) #14 - #4

Enclosure Rating: IP 20

Depth (D): 46 mm

Height (H): 77 mm

Width (W): 29 mm

Unit Weight: 0.150 kg

Certification Details: UL® 1059

Flammability Rating: UL® 94V-0

Complies With: IEC® 60947-7-1

ADDITIONAL PRODUCT DETAILS

Increase the number of outputs with one input using a jumper on blocks with a Max Current Rating, IEC up to 160 A.


Blocks with 1,000 VAC/DC Max Working Voltage, UL are ideal for solar applications.

Design Guideline for Distribution Blocks, Power Blocks and Power Terminals

Derating according to Ambient* Temperature (°C) to maintain working temperature of 85°C

Ambient Temperature (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
Derating Coefficient (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47

*environment around the terminal blocks inside the enclosure

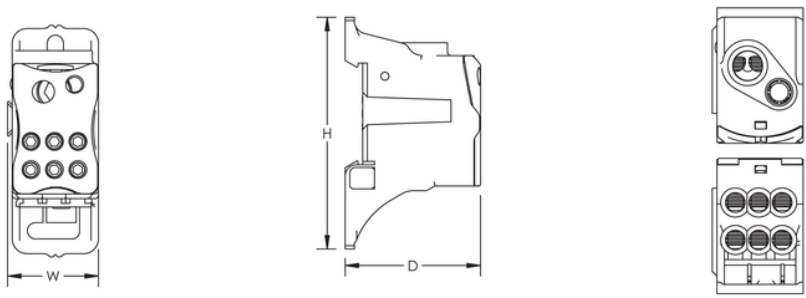

Our powerful portfolio of brands:
CADDY ERICO HOFFMAN RAYCHEM SCHROFF

TRACER