

Technical data sheet

328CS-024-10B-V/ST06
Rotary actuator for
GUAC controller

Description

Rotary actuator for adjusting dampers in combination with a GUAC controller for pressure and volumetric flow control in HVAC installations

- Running time 3 s / 90°
- Torque 10 Nm
- Nominal voltage 24 VAC/DC
- Control 6 ± 4 VDC (GUAC)
- Damper size up to approx. 2 m²
- Shaft coupling clamp
◇ 8-15 mm / Ø 8-20 mm



Technical data

Electrical data	Nominal voltage	24 VAC/DC, 50/60 Hz
	Nominal voltage range	19...29 VAC/DC
	Power consumption motor (motion)	18,0 W
	Power consumption standby (end position)	1,0 W
	Wire sizing	22,0 VA
	Control	6 ± 4 VDC (GUAC)
	Feedback signal	-
	Auxiliary switch	-
	Contact load	-
	Switching point	-
	Connection motor	-
	Connection feedback potentiometer	-
	Connection auxiliary switch	-
	Connection GUAC	cable 1000 mm with Lumberg connector
Functional data	Torque	10 Nm

Technical data

Functional data	Damper size	up to approx. 2 m ²
	Synchronised speed	-
	Direction of rotation	adjustable via GUAC
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	0°...max. 95° can be limited with adjustable mechanical end stops ; after changing the angle of rotation, a adaptation drive must be made
	Running time	3 s / 90°
	Sound power level	< 55 dB(A)
	Shaft coupling	clamp \varnothing 8-15 mm / \varnothing 8-20 mm
	Position indication	mechanical with pointer
	Service life	> 100 000 cycles (0°...95°...0°)
		> 1 500 000 partial cycles (max. $\pm 5^\circ$)
Safety	Protection class	III (safety extra-low voltage)
	Degree of protection	IP 54 (cable downwards)
	EMC	CE (2014/30/EU)
	LVD	CE (2014/35/EU)
	RoHS	CE (2011/65/EU - 2015/863/EU - 2017/2102/EU)
	Mode of operation	Typ 1 (EN 60730-1)
	Rated impulse voltage	0,8 kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
	Ambient humidity	5...95% r.H., non condensing (EN 60730-1)
Dimensions / Weight	Maintenance	maintenance free
	Dimensions	172 x 65 x 87 mm
	Weight	800 g

Functionality / Properties

Operating mode

Connect power supply to wire 1+2 and a reference signal Y to wire 3 in range of 6 ± 4 VDC (GUAC), actuator drives to its specified position.

The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

Direct mounting

Simple direct mounting on the damper shaft with a clamp, protection against rotating with enclosed anti-rotation lock or rather at intended attachment points.

Manual override

Manual override with self-resetting pushbutton possible (the gear is disengaged as long as the button is pressed).


Mode switch

Mode switch with five positions at the housing:



- 1: -
- 2: -
- 3: adaption
- 4: -
- 5: -

Adaption drive

- Actuator power off
- Setting the mechanical end stops
- Actuator power on
- Adaption enable
- Actuator drive to position 0
- Actuator drive to position 1
- Adaption disable, if desired angular range reached or rather if actuator reached endstop
- "Y" refers to the measured angular range

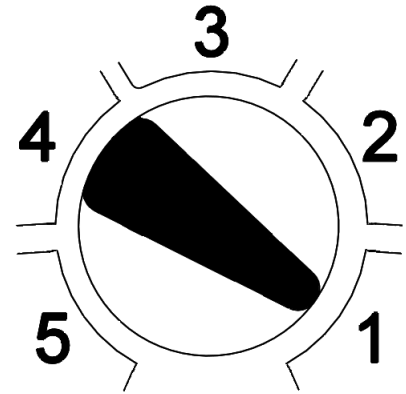

Connector / Security Note

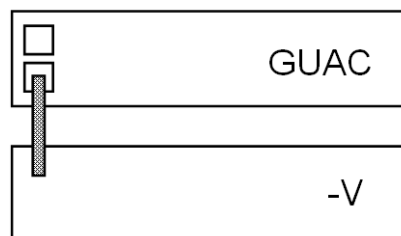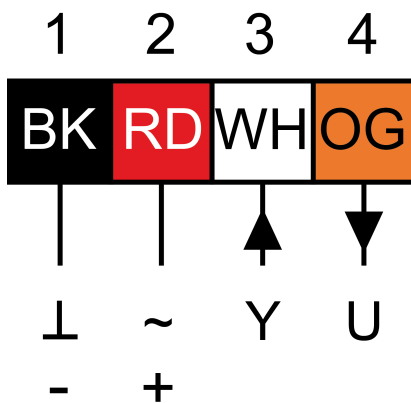

Safety remarks

- Connect via safety isolation transformer!
- The device is not allowed to be used outside the specified field of application, especially in airplanes.
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- The device is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- When calculating the required torque, the specifications supplied by the damper manufacturer's (cross-section, design, installation site), and the air flow conditions must be observed.

Technical Drawing

