


# V5PR32418

PROCONNECT 3PV5 Plug - Straight, 3P+E+2p, 570A, suits  
240mm cable, w/ Crimp Terminals



|                |                                     |
|----------------|-------------------------------------|
| Component type | Round socket/plug for high currents |
| Range          | 3PX/3PV                             |
| Model          | N/A                                 |

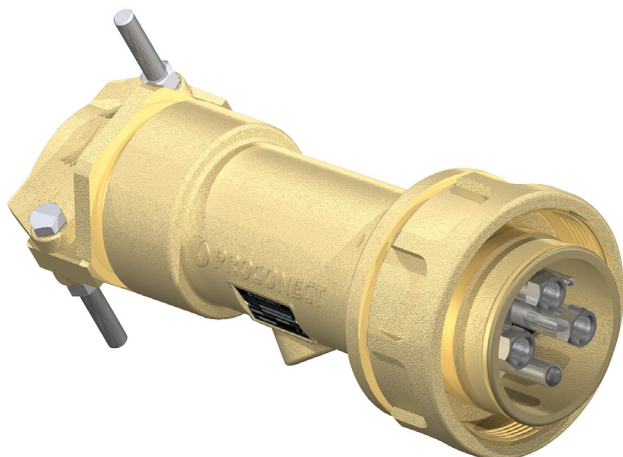

The Proconnect 3PX and 3PV range of high current plugs and sockets suit a variety of industries including mining, marine, transportation and commercial applications. Available in either a screw ring (3PV) or push-pull connection (3PX) type. Current ratings of 160A to 660A (at 3.3 kV) and corrosion proof aluminium construction make it ideal for the harsh Australian environment.

|              |                           |             |
|--------------|---------------------------|-------------|
| ELECTRICAL   | Amperage                  | 570.0 A     |
|              | Voltage                   | 1 - 3300 V  |
|              | Contact configuration     | 3P+E+2P     |
| CONSTRUCTION | Construction type         | Plug        |
|              | Material insulation body  | Other       |
|              | Degree of protection (IP) | IP67        |
| DIMENSIONS   | Weight                    | 4.7 kg      |
| ENVIRONMENT  | Operating temperature     | -30 - 60 °C |