

JD-2 | Air Pressure Switches



JD-2

Our JD-2 is compact, sensitive, and reliable pressure switch made by the leading manufacturer of pressure control switches. The design is based on the same principles of reliability, repeatability, and accuracy that have made all our pressure switches so successful.

FEATURES

- Sensitive diaphragm.
- Snap-action electrical switch S.P.D.T. rated at 10 amps.
- Visible ON-OFF indicator in compact die-cast aluminum housing.
- Spring adjustable switches—dual scales calibrated in millimeters and inches of water column.
- Five range scales—from 0.07" W.C. to a maximum of 35" W.C.
- Setpoint indication.
- Rugged die cast aluminum construction.

JD-2 | Air Pressure Switches

Specifications

Blue Spring	.07" to 1.7" W.C. (2 mm to 43 mm)
Grey Spring	0.1" to 4" W.C. (3 mm to 102 mm)
Purple Spring	0.1" to 10" W.C. (3 mm to 250 mm)
Red Spring	0.1" to 24" W.C. (3 mm to 600 mm)
Orange Spring	5" to 35" W.C. (125 mm to 875 mm)

Max. Operating Pressure: 35" W.C.

Max. Pressure Surge: 3 PSIG

Max. Ambient Operating Temperature: 140°F (60°C)

Min. Ambient Operating Temperature: -20°F (-28°C)

Shipping Weight: 1 lb. (.45 kg)

Switches manufactured by Antunes Controls are tested, listed, and approved by Underwriters Laboratories File # MH8009-504, Factory Mutual Serial #18221, Canadian Standards Association File #25144.

Electrical

10A, 1/8 HP, 125 VAC.

5A, 1/4 HP, 250 VAC.

Pilot Duty, 125 VA @ 125-250 VAC.

Field wiring by others must be rated at 194°F (90°C) for industrial use.

Options

Dust Proof: Specify "Dust Proof" on order. P/N 808000304


Brackets: Specify 2-5/8" bracket. P/N 808000303

Mounting

The Model JD-2 is always mounted with the stem up.

An optional mounting bracket can be fastened to the bottom section of the switch housing with 5/16-18 x 1/2" bolt (supplied with bracket).

Specifications

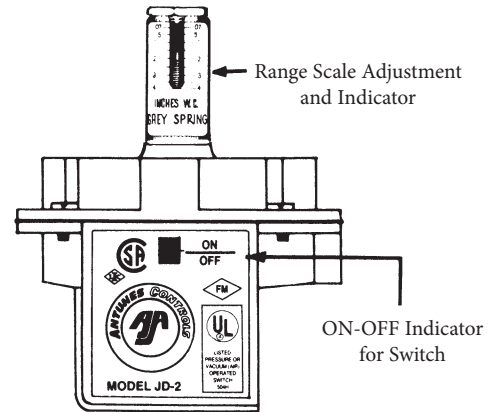

All switches have two 1/8" NPT inlets—one for pressure and one for vacuum.

Mounting Bracket

