

DAIDYNE DDK05



This product is an environmentally friendly "Lead free bearing."

This compound bearing, a "perfect oilless bearing" that does not require any lubricant at all uses polytetrafluoroethylene (PTFE) resin, has excellent low friction characteristics and also optimizes metal properties such as strength and dimensional stability.

Features

- ① The bearing surface has such low a coefficient of static and dynamic friction that the surface runs smoothly without lubrication, and in addition, the so-called stick and slip phenomenon is eliminated. The bearing can be used in oil as well.
- ② The operating temperature range extends from -200°C to +280°C.
- ③ Adaptable to operations under high-load, impact load, intermittent operation and reciprocating motion.
- ④ Free from electrostatic induction (When installed, each bearing has an electrical resistance of 1Ω to 10Ω per 1 cm² wide contact area.)
- ⑤ The bearing surface is highly resistant to most industrial chemicals and solvents such as petroleum and alcohol.
- ⑥ The bearing will not damage the surface of engaging component (shaft).
- ⑦ Extended service life.
- ⑧ The bearing is light and thin (max. 3 mm thick), requiring little space and permits compact equipment design.
- ⑨ The bearing minimizes operating noise.


Physical Characteristics (Typical Values)

Compressive Strength (MPa)	304
Coefficient of Linear Thermal Expansion ($10^{-6}/^{\circ}\text{C}$)	11 (direction parallel to bearing face), 30 (thickness direction)
Heat Transfer Coefficient (W/m·k)	42
Service Temperature Limit (°C)	-200~+280
Friction Coefficient	0.04 to 0.1 (below 6 m/min, 3.5 to 55 MPa) 0.06 to 0.18 (6 to 300 m/min, below 3.5 MPa)

Friction properties/characteristics of DDK05

The graph shows that during the running in stage, part of the surface layer rapidly transfers to the shaft surface to make to the irregularity flat and form a smooth low-wear and low-friction surface. During operation when the surface layer consisting of PTFE mixture becomes thinner friction between the metals of the bearing and the shaft temporarily occurs. Then the PTFE mixture expands due to the heat generated by the friction and the mixture is pushed out from the porous intermediate layer and supplied to the bearing surface very slowly. Therefore no wear occurs on the shaft.


<Table 1> Wear of DDK05

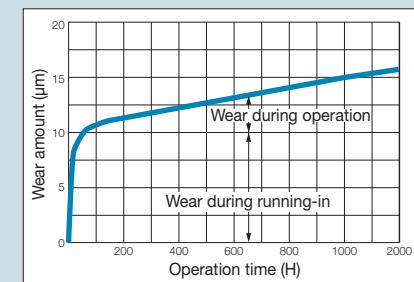

Designing DDK05

① PV value and wear

The service life of DDK05 is determined primarily by bearing load and PV value. The term PV value refers to the product of a pressure (P) in MPa and a velocity (V) in m/min. A bearing with a PV value of 206 MPa m/min can only operate for short periods of time. The maximum PV value for a bearing that can be used for continuous operation is 103 MPa m/min. Testing has shown that the rate of wear to a DDK05 after breaking in is roughly proportional to its PV value up to 0.04–0.05 mm of wear. Fig. 1 shows the relationship between service life and PV value.

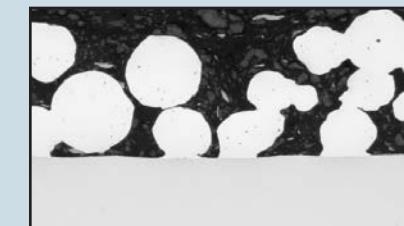

Prior to breaking in the bearing



Photographic cross-section of a DDK05 after breaking in and operating for a certain period of time.

② Basic relationship between service life and PV value (PV value in MPa·m/min)

● Bushings (unidirectional loading)

$$\text{Service life in hours (H)} = \frac{39 \times 10^3 \times f \times m}{PV} - C$$

NB: The term "unidirectional loading" refers to bearing loads applied to a fixed bushing by an axle that is either rotating or sliding.

● Bushings (rotational loading)

$$\text{Service life in hours (H)} = \frac{78 \times 10^3 \times f \times m}{PV} - C$$

NB: The term "rotational loading" refers to bearing loads applied to a rotating bushing by a fixed axle.

● Thrust washer

$$\text{Service life in hours (H)} = \frac{25 \times 10^3 \times f \times m}{PV} - C$$

NB: Refer to Table 2 on page 56 and Table 3 on page 57 for values of the coefficients f, m, and C.

③ Formula for calculating (PV value in MPa·m/min)

For rotational loading

Bushing	Thrust washer
$V = \pi dN / 10^3$	$V = \pi(D+d)N / 2 \times 10^3$
$P = W/Ld$	$P = W/(D^2 - d^2)\pi \times 4$
$PV = \pi WN / 10^3 L$	$PV = 2WN / 10^3 \cdot (D-d)$

V : rotating speed in m/min,

π : ratio of the circumference to the diameter,

d : inner diameter in mm

D : outer diameter in mm,

P : surface pressure in MPa


W : load in N,

N : rotational speed in rpm

NB1: During oscillating movement, the articulation θ in degrees (°) is calculated using a rotational speed N of $20C/360$, where C is the cycles per minute.

NB2: During axial movement, V is the sliding speed in meters per minute.

Fig. 1: Service life and PV value

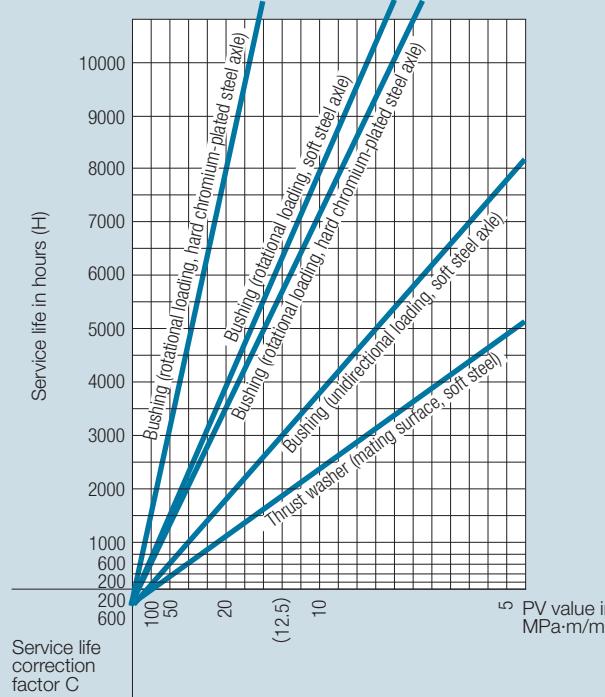**④ Load-bearing capacity (U)**

Although actual load-bearing capacity will vary with load characteristics, the maximum load that can be supported with DDK05 is as follows.

<Table1> Allowable load (U)

Types of loading	U MPa
① Static loading with virtually no movement or an extremely slow movement, where $V=0$.	137.0
② Rotational or oscillating movement, provided that the load affecting the DDK05 does not move.	55.0
③ When the DDK05 is subject to alternating or variable loads, the allowable load varies per the number of changes in loading that occur while the bearing is in use. (a) 10^5 times or less (b) 10^7 times or more	27.5 13.7

⑤ Operating factors (f)

<Table 2> Operating factors (f)

Operating conditions	Housing properties	Ambient temperature of axle in °C					
		25	60	100	150	200	280
Continuously dry conditions	For material with ordinary heat conductivity	1	0.8	0.6	0.4	0.2	0.1
	For material with poor heat conductivity	0.5	0.4	0.3	0.2	0.1	—
	For non-metallic housings with poor heat conductivity	0.3	0.3	0.2	0.1	—	—
Intermittently dry conditions (No more than two minutes of operation, followed by two minutes or more of rest.)	For material with ordinary heat conductivity	2	1.6	1.2	0.8	0.4	0.2
When continuously immersed in water		2	1.5	0.6	—	—	—
When alternating between immersion in water and dry conditions		0.2	0.1	—	—	—	—
When continuously immersed in fluids other than water (excluding lubricants)		1.5	1.2	0.9	0.6	0.3	0.1

④ Axle (mating surface) surface factor (m) and service life correction factor (C)

The surface factor (m) is applicable in cases where the mating surface roughness is equivalent or better to the former $R_{max} 3.2 \mu m$. In many cases, the surface finish is rougher than this and will require additional polishing to ensure the necessary surface quality.

<Table3>
Axe (mating surface) surface factor (m) and service life correction factor (C)

Material	Axle surface factor (m)	Service life correction factor (C)
Steel		
Soft steel	1	200
Hardened steel	1	200
Nitrided steel	1	200
Cast iron	1	200
Stainless steel	2	200
Thermal spray stainless steel	1	200
Non-ferrous		
Anodized aluminum	0.4	200
Hard anodized aluminum (0.025-mm coating)	3	600
Bronze and copper alloys	0.2	200
Galvanized steel (0.013-mm coating or more)		
Hard chromium	2	600
Lead	1.5	600
Tin-nickel	1.2	600
Nickel	0.2	600
Cadmium	0.2	600
Zinc	0.2	600
Thermal spray tungsten carbide	3	600
Phosphate-coated steel	0.2	300

NB: Refer to Fig. 11 on page 152 for the relationship between mating surface roughness and wear.

K5B DDK05 Bushing (Bushing Inner Diameter: 3 to 28 mm)

Designation of Part Number


K5 B 00 00

- Bushing Length
- Bushing Nominal I.D.
- Bushing
- Product Symbol



K5B 0303

Please specify by part number.

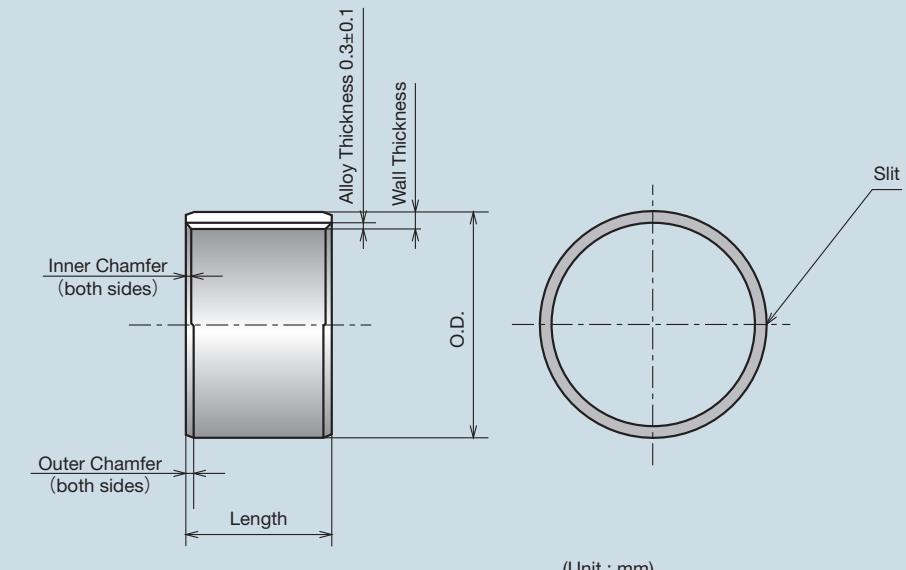

(Unit : mm)

Bushings I.D.	Recommended Dimension Mating Part		Bushing Dimensions												Bushings I.D.					
	Houshing I.D.	Shaft Dia.	O.D.	Wall Thickness	3	4	5	6	7	8	10	12	15	20	25	30	35	40		
3	$\phi 5H7^{+0.012}_0$	$\phi 3^{-0.025}_{-0.035}$	$\phi 5^{+0.047}_0$	$1.0^0_{-0.025}$	0303	0304	0305	0306										3		
4	$\phi 6H7^{+0.012}_0$	$\phi 4^{-0.025}_{-0.037}$	$\phi 6^{+0.047}_0$	$1.0^0_{-0.025}$	0403	0404	0405	0406		0408								4		
5	$\phi 7H7^{+0.015}_0$	$\phi 5^{-0.025}_{-0.037}$	$\phi 7^{+0.053}_0$	$1.0^0_{-0.025}$	0503	0504	0505	0506		0508								5		
6	$\phi 8H7^{+0.015}_0$	$\phi 6^{-0.025}_{-0.037}$	$\phi 8^{+0.053}_0$	$1.0^0_{-0.025}$	0603	0604	0605	0606	0607	0608	0610	0612						6		
7	$\phi 9H7^{+0.015}_0$	$\phi 7^{-0.025}_{-0.040}$	$\phi 9^{+0.053}_0$	$1.0^0_{-0.025}$			0705	0706	0707	0708	0710	0712						7		
8	$\phi 10H7^{+0.015}_0$	$\phi 8^{-0.025}_{-0.040}$	$\phi 10^{+0.055}_0$	$1.0^0_{-0.025}$			0805	0806	0807	0808	0810	0812	0815					8		
9	$\phi 11H7^{+0.018}_0$	$\phi 9^{-0.025}_{-0.040}$	$\phi 11^{+0.060}_0$	$1.0^0_{-0.025}$				0906			0910							9		
10	$\phi 12H7^{+0.018}_0$	$\phi 10^{-0.025}_{-0.040}$	$\phi 12^{+0.060}_0$	$1.0^0_{-0.025}$				1006	1007	1008	1010	1012	1015	1020				10		
12	$\phi 14H7^{+0.018}_0$	$\phi 12^{-0.025}_{-0.043}$	$\phi 14^{+0.060}_0$	$1.0^0_{-0.025}$				1206		1208	1210	1212	1215	1220				12		
13	$\phi 15H7^{+0.018}_0$	$\phi 13^{-0.025}_{-0.043}$	$\phi 15^{+0.063}_0$	$1.0^0_{-0.025}$						1308	1310	1312	1315	1320				13		
14	$\phi 16H7^{+0.018}_0$	$\phi 14^{-0.025}_{-0.043}$	$\phi 16^{+0.063}_0$	$1.0^0_{-0.025}$						1408	1410	1412	1415	1420				14		
15	$\phi 17H7^{+0.018}_0$	$\phi 15^{-0.025}_{-0.043}$	$\phi 17^{+0.073}_0$	$1.0^0_{-0.025}$						1508	1510	1512	1515	1520	1525				15	
16	$\phi 18H7^{+0.018}_0$	$\phi 16^{-0.025}_{-0.043}$	$\phi 18^{+0.073}_0$	$1.0^0_{-0.025}$							1610	1612	1615	1620	1625				16	
17	$\phi 19H7^{+0.021}_0$	$\phi 17^{-0.025}_{-0.043}$	$\phi 19^{+0.081}_0$	$1.0^0_{-0.025}$							1710		1715						17	
18	$\phi 20H7^{+0.021}_0$	$\phi 18^{-0.025}_{-0.043}$	$\phi 20^{+0.081}_0$	$1.0^0_{-0.025}$							1810	1812	1815	1820	1825	1830				18
19	$\phi 22H7^{+0.021}_0$	$\phi 19^{-0.025}_{-0.046}$	$\phi 22^{+0.081}_0$	$1.5^0_{-0.030}$							1910		1915	1920					19	
20	$\phi 23H7^{+0.021}_0$	$\phi 20^{-0.025}_{-0.046}$	$\phi 23^{+0.081}_0$	$1.5^0_{-0.030}$							2010	2012	2015	2020	2025	2030				20
22	$\phi 25H7^{+0.021}_0$	$\phi 22^{-0.025}_{-0.046}$	$\phi 25^{+0.086}_0$	$1.5^0_{-0.030}$							2210	2212	2215	2220	2225	2230				22
24	$\phi 27H7^{+0.021}_0$	$\phi 24^{-0.025}_{-0.046}$	$\phi 27^{+0.086}_0$	$1.5^0_{-0.030}$								2415	2420	2425	2430				24	
25	$\phi 28H7^{+0.021}_0$	$\phi 25^{-0.025}_{-0.046}$	$\phi 28^{+0.093}_0$	$1.5^0_{-0.030}$							2510	2512	2515	2520	2525	2530	2535			25
26	$\phi 30H7^{+0.021}_0$	$\phi 26^{-0.025}_{-0.046}$	$\phi 30^{+0.115}_0$	$2.0^0_{-0.030}$								2615	2620	2625	2630					26
28	$\phi 32H7^{+0.025}_0$	$\phi 28^{-0.025}_{-0.046}$	$\phi 32^{+0.115}_0$	$2.0^0_{-0.030}$								2812	2815	2820	2825	2830				28

K5B DDK05 Bushing (Bushing Inner Diameter: 30 to 160 mm)

Designation of Part Number


K5 B 00 00

- Bushing Length
- Bushing Nominal I.D.
- Bushing
- Product Symbol



K5B 3012

Please specify by part number.

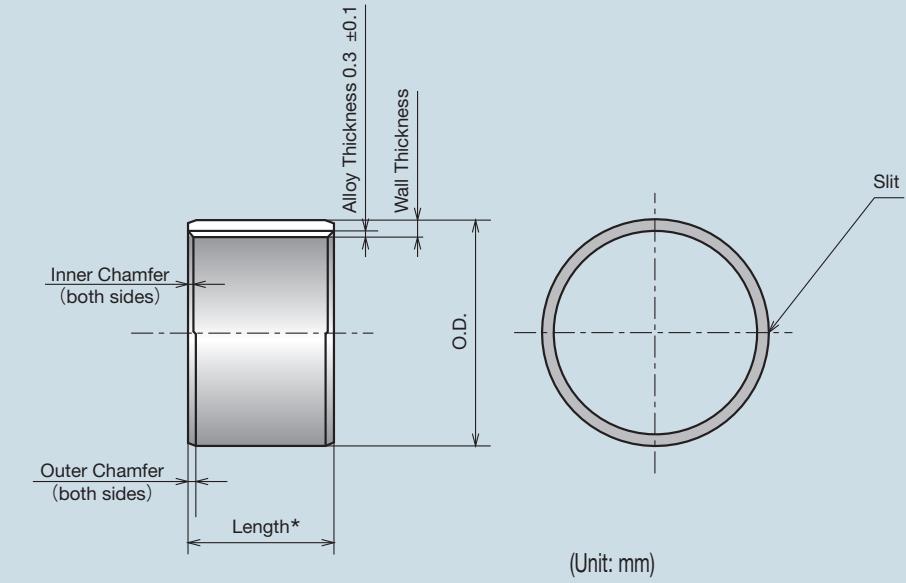

Bushings I.D.	Recommended Dimension Mating Part		Bushing Dimensions												Bushings I.D.				
	Houshing I.D.	Shaft Dia.	O.D.	Wall Thickness	12	15	20	25	30	35	40	50	60	70	80	90	95	100	
30	$\phi 34H7^{+0.025}_0$	$\phi 30^{-0.025}_{-0.046}$	$\phi 34^{+0.115}_{+0.075}$	$2.0^0_{-0.030}$	3012	3015	3020	3025	3030	3035	3040	3050					30		
31	$\phi 35H7^{+0.025}_0$	$\phi 31^{-0.025}_{-0.050}$	$\phi 35^{+0.115}_{+0.075}$	$2.0^0_{-0.030}$		3115		3125	3130		3140						31		
32	$\phi 36H7^{+0.025}_0$	$\phi 32^{-0.025}_{-0.050}$	$\phi 36^{+0.115}_{+0.075}$	$2.0^0_{-0.030}$		3215	3220	3225	3230		3240						32		
35	$\phi 39H7^{+0.025}_0$	$\phi 35^{-0.025}_{-0.050}$	$\phi 39^{+0.115}_{+0.075}$	$2.0^0_{-0.030}$	3512	3515	3520	3525	3530	3535	3540	3550					35		
38	$\phi 42H7^{+0.025}_0$	$\phi 38^{-0.025}_{-0.050}$	$\phi 42^{+0.115}_{+0.075}$	$2.0^0_{-0.030}$			3820	3825	3830	3835	3840						38		
40	$\phi 44H7^{+0.025}_0$	$\phi 40^{-0.025}_{-0.050}$	$\phi 44^{+0.115}_{+0.075}$	$2.0^0_{-0.030}$	4012	4015	4020	4025	4030	4035	4040	4050					40		
45	$\phi 50H7^{+0.025}_0$	$\phi 45^{-0.025}_{-0.050}$	$\phi 50^{+0.115}_{+0.075}$	$2.5^0_{-0.040}$		4520	4525	4530	4535		4540	4550					45		
50	$\phi 55H7^{+0.030}_0$	$\phi 50^{-0.025}_{-0.050}$	$\phi 55^{+0.145}_{+0.095}$	$2.5^0_{-0.040}$			5020	5025	5030	5035	5040	5050	5060				50		
55	$\phi 60H7^{+0.030}_0$	$\phi 55^{-0.025}_{-0.055}$	$\phi 60^{+0.145}_{+0.095}$	$2.5^0_{-0.040}$				5525	5530	5535	5540	5550	5560				55		
60	$\phi 65H7^{+0.030}_0$	$\phi 60^{-0.025}_{-0.055}$	$\phi 65^{+0.145}_{+0.095}$	$2.5^0_{-0.040}$					6030	6035	6040	6050	6060	6080				60	
65	$\phi 70H7^{+0.030}_0$	$\phi 65^{-0.035}_{-0.055}$	$\phi 70^{+0.145}_{+0.095}$	$2.47^0_{-0.050}$					6530		6540	6550	6560					65	
70	$\phi 75H7^{+0.030}_0$	$\phi 70^{-0.035}_{-0.055}$	$\phi 75^{+0.145}_{+0.095}$	$2.47^0_{-0.050}$					7030	7035	7040	7050	7060	7070	7080			70	
75	$\phi 80H7^{+0.030}_0$	$\phi 75^{-0.035}_{-0.055}$	$\phi 80^{+0.160}_{+0.095}$	$2.47^0_{-0.050}$					7530	7535	7540	7550	7560		7580			75	
80	$\phi 85H7^{+0.035}_0$	$\phi 80^{-0.035}_{-0.055}$	$\phi 80^{+0.165}_{+0.100}$	$2.47^0_{-0.050}$							8040	8050	8060	8080				80	
85	$\phi 90H7^{+0.035}_0$	$\phi 85^{-0.035}_{-0.055}$	$\phi 90^{+0.165}_{+0.100}$	$2.47^0_{-0.050}$							8540	8550	8560	8580				85	
90	$\phi 95H7^{+0.035}_0$	$\phi 90^{-0.035}_{-0.055}$	$\phi 95^{+0.165}_{+0.100}$	$2.47^0_{-0.050}$							9040	9050	9060		9090			90	
100	$\phi 105H7^{+0.035}_0$	$\phi 100^{-0.035}_{-0.055}$	$\phi 105^{+0.180}_{+0.110}$	$2.47^0_{-0.050}$								10050		10070	10080		10095	100100	100
110	$\phi 115H7^{+0.035}_0$	$\phi 110^{-0.035}_{-0.055}$	$\phi 115^{+0.180}_{+0.110}$	$2.47^0_{-0.050}$								11050		11070			11095	110100	110
120	$\phi 125H7^{+0.040}_0$	$\phi 120^{-0.035}_{-0.055}$	$\phi 125^{+0.185}_{+0.120}$	$2.47^0_{-0.050}$								12050		12070			12095	120100	120
130	$\phi 135H7^{+0.040}_0$	$\phi 130^{-0.035}_{-0.055}$	$\phi 135^{+0.185}_{+0.120}$	$2.47^0_{-0.050}$								13050			13080			130100	130
140	$\phi 145H7^{+0.040}_0$	$\phi 140^{-0.035}_{-0.055}$	$\phi 145^{+0.185}_{+0.120}$	$2.47^0_{-0.050}$								14050			14080			140100	140
150	$\phi 155H7^{+0.040}_0$	$\phi 150^{-0.035}_{-0.055}$	$\phi 155^{+0.205}_{+0.140}$	$2.47^0_{-0.050}$								15050			15080			150100	150
160	$\phi 165H7^{+0.040}_0$	$\phi 160^{-0.035}_{-0.055}$	$\phi 165^{+0.205}_{+0.140}$	$2.47^0_{-0.050}$								16050			16080			160100	160

*Width tolerance is :
~ID 110 $^{+0.03}_{-0.03}$
OD 120 ~ $^{+0.04}_{-0.04}$

K5F DDK05 Flanged Bushing (Bushing Inner Diameter: 3 to 60 mm)


Designation of Part Number

The diagram illustrates the breakdown of a part number for a flanged bushing. The part number is shown as 'K5 F 00 00 00'. A vertical line extends from the first character 'K' to the left, and a horizontal line extends from the second character 'F' to the right. From the end of the 'F' line, two vertical lines descend to the first two zeros ('00'). From the end of the second zero, a horizontal line extends to the right, ending at the third zero ('00'). This third zero is labeled 'Flange O.D.'. Below it, another horizontal line extends to the fourth zero ('00'), which is labeled 'Bushing Length'. A third horizontal line extends to the fifth zero ('00'), which is labeled 'Bushing Nominal I.D.'. A fourth horizontal line extends to the right from the fifth zero, ending at the final zero ('00'). This final zero is labeled 'Flanged Bushing'. Finally, a long horizontal line extends from the end of the fourth zero to the right, ending at the symbol 'P', which is labeled 'Product Symbol'.



K5F 0303-7

Please specify by part number:

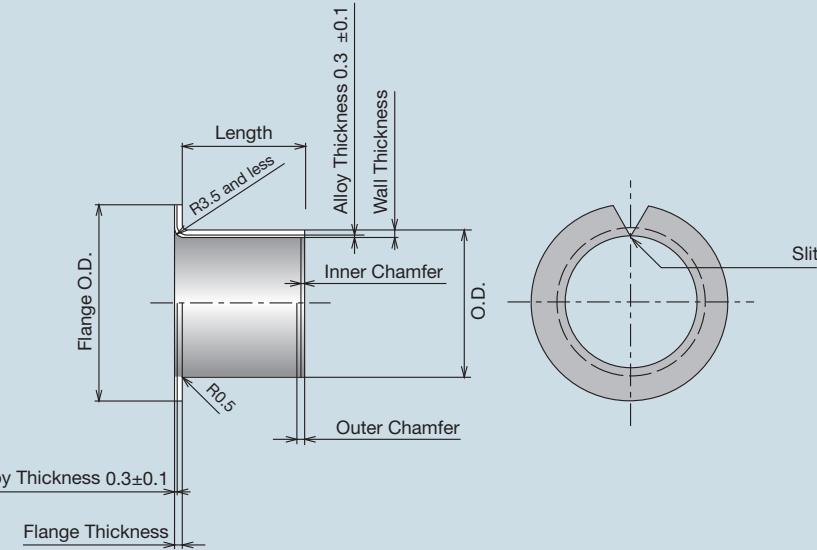

Bushing I.D.	Recommended Dimension Mating Part		Bushing Dimensions																		Bushing I.D.					
	Housing I.D.	Shaft Dia.	Flange O.D.	Flange Thickness	O.D.	Wall Thickness	Part Number & Bushing Length Tolerance ${}^0_{-0.3}$																			
							3	4	5	6	7	8	10	12	15	20	25	30	40	50	60					
3	$\phi 4.6H7$ ${}^{+0.012}_{-0}$	$\phi 3$ ${}^{-0.025}_{-0.035}$	$\phi 7$ ${}^0_{-0.8}$	0.8 ${}^0_{-0.15}$	$\phi 4.6$ ${}^{+0.047}_{+0.017}$	0.8 ${}^0_{-0.025}$	0303-7		0305-7													3				
4	$\phi 5.6H7$ ${}^{+0.012}_{-0}$	$\phi 4$ ${}^{-0.025}_{-0.037}$	$\phi 9$ ${}^0_{-0.8}$	0.8 ${}^0_{-0.15}$	$\phi 5.6$ ${}^{+0.047}_{+0.017}$	0.8 ${}^0_{-0.025}$		0404-9		0406-9												4				
5	$\phi 7H7$ ${}^{+0.015}_{-0}$	$\phi 5$ ${}^{-0.025}_{-0.037}$	$\phi 10$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 7$ ${}^{+0.053}_{+0.023}$	1.0 ${}^0_{-0.025}$		0504-10	0505-10	0506-10												5				
6	$\phi 8H7$ ${}^{+0.015}_{-0}$	$\phi 6$ ${}^{-0.025}_{-0.037}$	$\phi 12$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 8$ ${}^{+0.053}_{+0.023}$	1.0 ${}^0_{-0.025}$			0605-12	0606-12			0607-12	0608-12	0610-12							6				
7	$\phi 9H7$ ${}^{+0.015}_{-0}$	$\phi 7$ ${}^{-0.025}_{-0.040}$	$\phi 13$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 9$ ${}^{+0.053}_{+0.023}$	1.0 ${}^0_{-0.025}$			0705-13				0707-13		0710-13	0712-13						7				
8	$\phi 10H7$ ${}^{+0.015}_{-0}$	$\phi 8$ ${}^{-0.025}_{-0.040}$	$\phi 15$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 10$ ${}^{+0.055}_{+0.025}$	1.0 ${}^0_{-0.025}$				0806-15					0808-15	0810-15	0812-15						8			
10	$\phi 12H7$ ${}^{+0.018}_{-0}$	$\phi 10$ ${}^{-0.025}_{-0.040}$	$\phi 18$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 12$ ${}^{+0.060}_{+0.030}$	1.0 ${}^0_{-0.025}$				1006-18				1007-18	1008-18	1010-18	1012-18	1015-18					10			
12	$\phi 14H7$ ${}^{+0.018}_{-0}$	$\phi 12$ ${}^{-0.025}_{-0.043}$	$\phi 20$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 14$ ${}^{+0.060}_{+0.030}$	1.0 ${}^0_{-0.025}$				1206-20				1207-20	1208-20	1210-20	1212-20	1215-20	1220-20				12			
14	$\phi 16H7$ ${}^{+0.018}_{-0}$	$\phi 14$ ${}^{-0.025}_{-0.043}$	$\phi 22$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 16$ ${}^{+0.063}_{+0.033}$	1.0 ${}^0_{-0.025}$										1410-22	1412-22	1415-22	1420-22				14			
15	$\phi 17H7$ ${}^{+0.018}_{-0}$	$\phi 15$ ${}^{-0.025}_{-0.043}$	$\phi 23$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 17$ ${}^{+0.073}_{+0.038}$	1.0 ${}^0_{-0.025}$										1510-23	1512-23	1515-23	1520-23	1525-23				15		
16	$\phi 18H7$ ${}^{+0.018}_{-0}$	$\phi 16$ ${}^{-0.025}_{-0.043}$	$\phi 24$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 18$ ${}^{+0.073}_{+0.038}$	1.0 ${}^0_{-0.025}$										1610-24	1612-24	1615-24	1620-24	1625-24				16		
18	$\phi 20H7$ ${}^{+0.021}_{-0}$	$\phi 18$ ${}^{-0.025}_{-0.043}$	$\phi 26$ ${}^0_{-0.8}$	1.0 ${}^0_{-0.15}$	$\phi 20$ ${}^{+0.081}_{+0.046}$	1.0 ${}^0_{-0.025}$										1810-26	1812-26	1815-26	1820-26	1825-26				18		
20	$\phi 23H7$ ${}^{+0.021}_{-0}$	$\phi 20$ ${}^{-0.025}_{-0.046}$	$\phi 31$ ${}^0_{-0.8}$	1.5 ${}^0_{-0.15}$	$\phi 23$ ${}^{+0.081}_{+0.046}$	1.5 ${}^0_{-0.030}$										2010-31	2012-31	2015-31	2020-31	2025-31	2030-31				20	
22	$\phi 25H7$ ${}^{+0.021}_{-0}$	$\phi 22$ ${}^{-0.025}_{-0.046}$	$\phi 33$ ${}^0_{-0.8}$	1.5 ${}^0_{-0.15}$	$\phi 25$ ${}^{+0.086}_{+0.051}$	1.5 ${}^0_{-0.030}$										2210-33	2212-33	2215-33	2220-33	2225-33				22		
24	$\phi 27H7$ ${}^{+0.021}_{-0}$	$\phi 24$ ${}^{-0.025}_{-0.046}$	$\phi 35$ ${}^0_{-0.8}$	1.5 ${}^0_{-0.15}$	$\phi 27$ ${}^{+0.086}_{+0.051}$	1.5 ${}^0_{-0.030}$											2415-35	2420-35	2425-35	2430-35				24		
25	$\phi 28H7$ ${}^{+0.021}_{-0}$	$\phi 25$ ${}^{-0.025}_{-0.046}$	$\phi 36$ ${}^0_{-0.8}$	1.5 ${}^0_{-0.15}$	$\phi 28$ ${}^{+0.093}_{+0.056}$	1.5 ${}^0_{-0.030}$											2510-36	2512-36	2515-36	2520-36	2525-36	2530-36				25
26	$\phi 30H7$ ${}^{+0.021}_{-0}$	$\phi 26$ ${}^{-0.025}_{-0.046}$	$\phi 38$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 30$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$												2615-38	2620-38						26	
28	$\phi 32H7$ ${}^{+0.025}_{-0}$	$\phi 28$ ${}^{-0.025}_{-0.046}$	$\phi 40$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 32$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$											2812-40	2815-40	2820-40		2830-40				28	
30	$\phi 34H7$ ${}^{+0.025}_{-0}$	$\phi 30$ ${}^{-0.025}_{-0.046}$	$\phi 42$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 34$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$											3012-42	3015-42	3020-42	3025-42	3030-42	3040-42				30
31	$\phi 35H7$ ${}^{+0.025}_{-0}$	$\phi 31$ ${}^{-0.025}_{-0.050}$	$\phi 45$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 35$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$													3125-45							31
32	$\phi 36H7$ ${}^{+0.025}_{-0}$	$\phi 32$ ${}^{-0.025}_{-0.050}$	$\phi 46$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 36$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$													3220-46	3225-46	3230-46					32
35	$\phi 39H7$ ${}^{+0.025}_{-0}$	$\phi 35$ ${}^{-0.025}_{-0.050}$	$\phi 49$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 39$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$											3512-49		3520-49	3525-49	3530-49	3540-49	3550-49			35
38	$\phi 42H7$ ${}^{+0.025}_{-0}$	$\phi 38$ ${}^{-0.025}_{-0.050}$	$\phi 52$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 42$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$													3820-52		3830-52	3840-52				38
40	$\phi 44H7$ ${}^{+0.025}_{-0}$	$\phi 40$ ${}^{-0.025}_{-0.050}$	$\phi 54$ ${}^0_{-0.8}$	2.0 ${}^0_{-0.15}$	$\phi 44$ ${}^{+0.115}_{+0.075}$	2.0 ${}^0_{-0.030}$											4012-54		4020-54	4025-54	4030-54	4040-54	4050-54			40
45	$\phi 50H7$ ${}^{+0.025}_{-0}$	$\phi 45$ ${}^{-0.025}_{-0.050}$	$\phi 60$ ${}^0_{-0.8}$	2.5 ${}^0_{-0.15}$	$\phi 50$ ${}^{+0.115}_{+0.075}$	2.5 ${}^0_{-0.040}$												4520-60	4525-60	4530-60	4540-60	4550-60				45
50	$\phi 55H7$ ${}^{+0.030}_{-0}$	$\phi 50$ ${}^{-0.025}_{-0.050}$	$\phi 65$ ${}^0_{-0.8}$	2.5 ${}^0_{-0.15}$	$\phi 55$ ${}^{+0.145}_{+0.095}$	2.5 ${}^0_{-0.040}$												5020-65		5030-65	5040-65		5060-65		50	
55	$\phi 60H7$ ${}^{+0.030}_{-0}$	$\phi 55$ ${}^{-0.025}_{-0.050}$	$\phi 70$ ${}^0_{-0.8}$	2.5 ${}^0_{-0.15}$	$\phi 60$ ${}^{+0.145}_{+0.095}$	2.5 ${}^0_{-0.040}$												5530-70	5540-70		5560-70				55	
60	$\phi 65H7$ ${}^{+0.030}_{-0}$	$\phi 60$ ${}^{-0.025}_{-0.050}$	$\phi 75$ ${}^0_{-0.8}$	2.5 ${}^0_{-0.15}$	$\phi 65$ ${}^{+0.145}_{+0.095}$	2.5 ${}^0_{-0.040}$												6030-75	6040-75		6060-75				60	


K5T DDK05 Thrust Washer

Designation of Part Number

K5

T


00
Nominal I.D.
Thrust Washer
Product Symbol

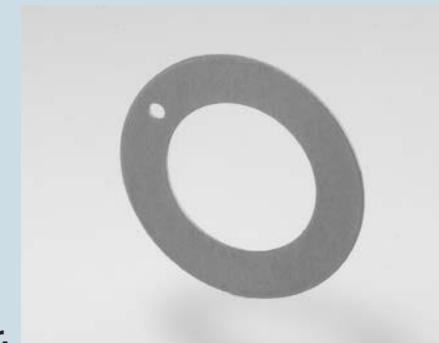

K5T 06

Please specify by part number.

Nominal I.D.	Part Number	I.D.	O.D.	Thickness	Knock Pin Hole		Housing Recess Depth
					Dia.	P. C. D	
6	K5T06	8 ^{+0.25} ₀	16 ⁰ _{-0.25}		1.100 ^{+0.20} ₀	12 ^{±0.12}	
8	K5T08	10 ^{+0.25} ₀	18 ⁰ _{-0.25}			14 ^{±0.12}	
10	K5T10	12 ^{+0.25} ₀	24 ⁰ _{-0.25}		1.625 ^{+0.25} ₀	18 ^{±0.12}	
12	K5T12	14 ^{+0.25} ₀	26 ⁰ _{-0.25}		2.125 ^{+0.25} ₀	20 ^{±0.12}	
14	K5T14	16 ^{+0.25} ₀	30 ⁰ _{-0.25}			23 ^{±0.12}	
16	K5T16	18 ^{+0.25} ₀	32 ⁰ _{-0.25}			25 ^{±0.12}	
18	K5T18	20 ^{+0.25} ₀	36 ⁰ _{-0.25}			28 ^{±0.12}	
20	K5T20	22 ^{+0.25} ₀	38 ⁰ _{-0.25}		3.125 ^{+0.25} ₀	30 ^{±0.12}	
22	K5T22	24 ^{+0.25} ₀	42 ⁰ _{-0.25}			33 ^{±0.12}	
24	K5T24	26 ^{+0.25} ₀	44 ⁰ _{-0.25}			35 ^{±0.12}	
25	K5T25	28 ^{+0.25} ₀	48 ⁰ _{-0.25}			38 ^{±0.12}	
30	K5T30	32 ^{+0.25} ₀	54 ⁰ _{-0.25}			43 ^{±0.12}	
35	K5T35	38 ^{+0.25} ₀	62 ⁰ _{-0.25}			50 ^{±0.12}	
40	K5T40	42 ^{+0.25} ₀	66 ⁰ _{-0.25}		4.125 ^{+0.25} ₀	54 ^{±0.12}	
45	K5T45	48 ^{+0.25} ₀	74 ⁰ _{-0.25}	2.0 ^{+0.03} _{-0.08}		61 ^{±0.12}	1.5 ^{+0.20} _{-0.05}
50	K5T50	52 ^{+0.25} ₀	78 ⁰ _{-0.25}			65 ^{±0.12}	

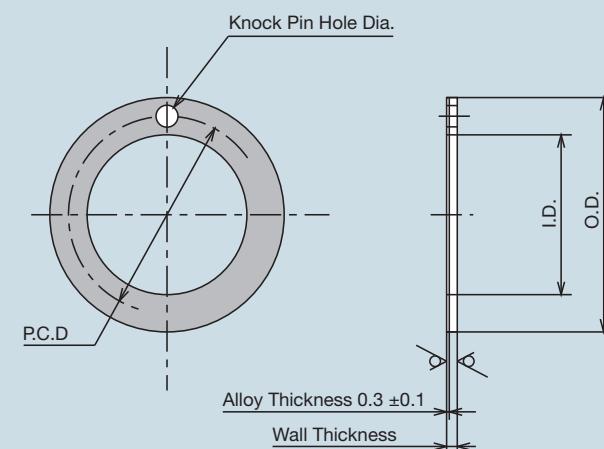


K5P DDK05 SlidePlate

Designation of Part Number

K5

P

00
Thickness Indication Symbol
Slide Plate
Product Symbol

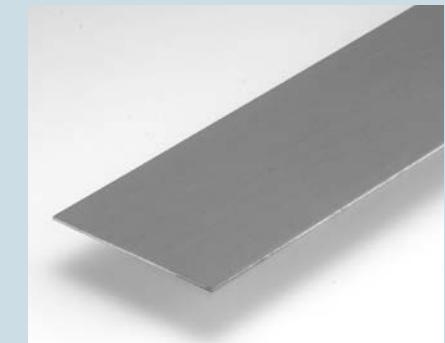


K5P 100

Please specify by part number.

(Unit: mm)

Part Number	Thickness	Width	Length
K5P100	1.0 ^{+0.03} _{-0.13}	80 ^{+2.0} ₀	500 ^{+10.0} ₀
K5P150	1.5 ^{+0.03} _{-0.13}	90 ^{+2.0} ₀	
K5P200	2.0 ^{+0.03} _{-0.13}	100 ^{+2.0} ₀	
K5P250	2.5 ^{-0.05} _{-0.15}	100 ^{+2.0} ₀	
K5P300	3.0 ⁰ _{-0.1}	100 ^{+2.0} ₀	

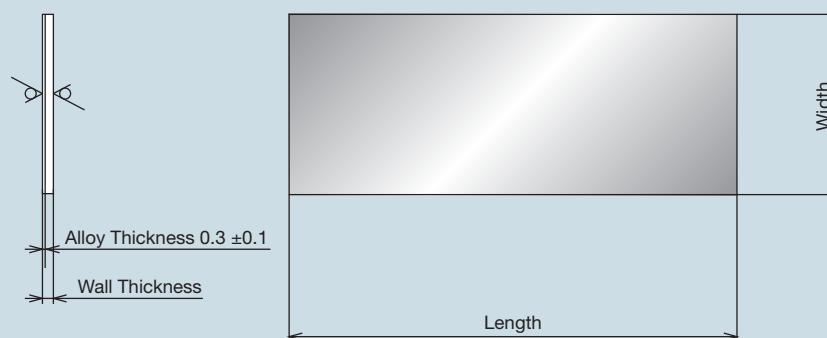

Pb

Free

RoHS

ELV