

EX42000 Series

Industrial Unmanaged 5-port 10/100BASE Ethernet Switch



Overview

EtherWAN's EX42000 Series is a compact industrial unmanaged Fast Ethernet switch, designed for easy deployment in harsh environments.

The EX42000 Series is equipped with 5 Fast Ethernet copper ports, or a combination of 4 Fast Ethernet copper ports and 1 Fast Ethernet fiber port for long distance connectivity. This switch features 10/100Mbps transfer speeds, full/half-duplex auto-negotiation, and auto MDI/MDIX operation, allowing for fast and hassle-free connection and setup.

Although unmanaged, the EX42000 is feature-rich with full wire speed Fast Ethernet throughput, QoS (Quality of Service), Broadcast storm protection, IEEE 802.3az EEE (Energy Efficient Ethernet), and 4kV surge protection. The EX42000 can be DIN rail mounted, and its compact size makes it an ideal solution for factory floors, warehouses, and locations without climate control.

EtherWAN – “When Connectivity is Crucial.”

Spotlight

• Industrial Grade

- Supports -10 to 60°C (14 to 140°F) operating temperature
- Supports DIN-Rail mounting

• Fiber Connectivity

- Up to one 100BASE-FX port with SC and ST options

• 4kV Surge Protection on Data port

- Augmented 4kV surge protection in accordance with EN 61000-4-5

• Broadcast Storm Protection Threshold

- 30 Frames/10ms for 100Mbps
- 30 Frames/100ms for 10Mbps

Hardware Specifications

Technology

Standards

- IEEE 802.3u 100BASE-TX/FX
- IEEE 802.3x full-duplex flow control
- IEEE 802.3az Energy Efficient Ethernet
- IEEE 802.1p Quality of Service (QoS)

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 448K bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 1K MAC addresses

Power

Input Voltage

- Terminal block: 12-48VDC

Power Consumption

- 1.82W Max. 0.14A@12VDC, 0.07A@24VDC, 0.038A@48VDC

Protection

- Reverse polarity protection

Mechanical

Casing

- Plastic case
- IP30

Dimensions

- 26 x 70 x 110mm (W x D x H)
(1.02" x 2.76" x 4.33")

Weight

- 0.2Kg (0.44lbs.)

Installation

- DIN-Rail (Top hat type 35mm)

Interface

Ethernet Ports

- 10/100BASE-TX: 5 or 4 ports
- 100BASE-FX: 0 or 1 port

LED Indicators

- Per Unit: Power (Green)
- Per Port: Link/Activity (Green), Speed (Yellow)

Environment

Operating Temperature

- 10 to 60°C (14 to 140°F)
Tested @ -20 to 70°C (-4 to 158°F)

Storage Temperature

- -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO 9001 facility

Safety

UL 62368

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
Signal ports: ± 4 kV line-to-ground
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

Dimensions

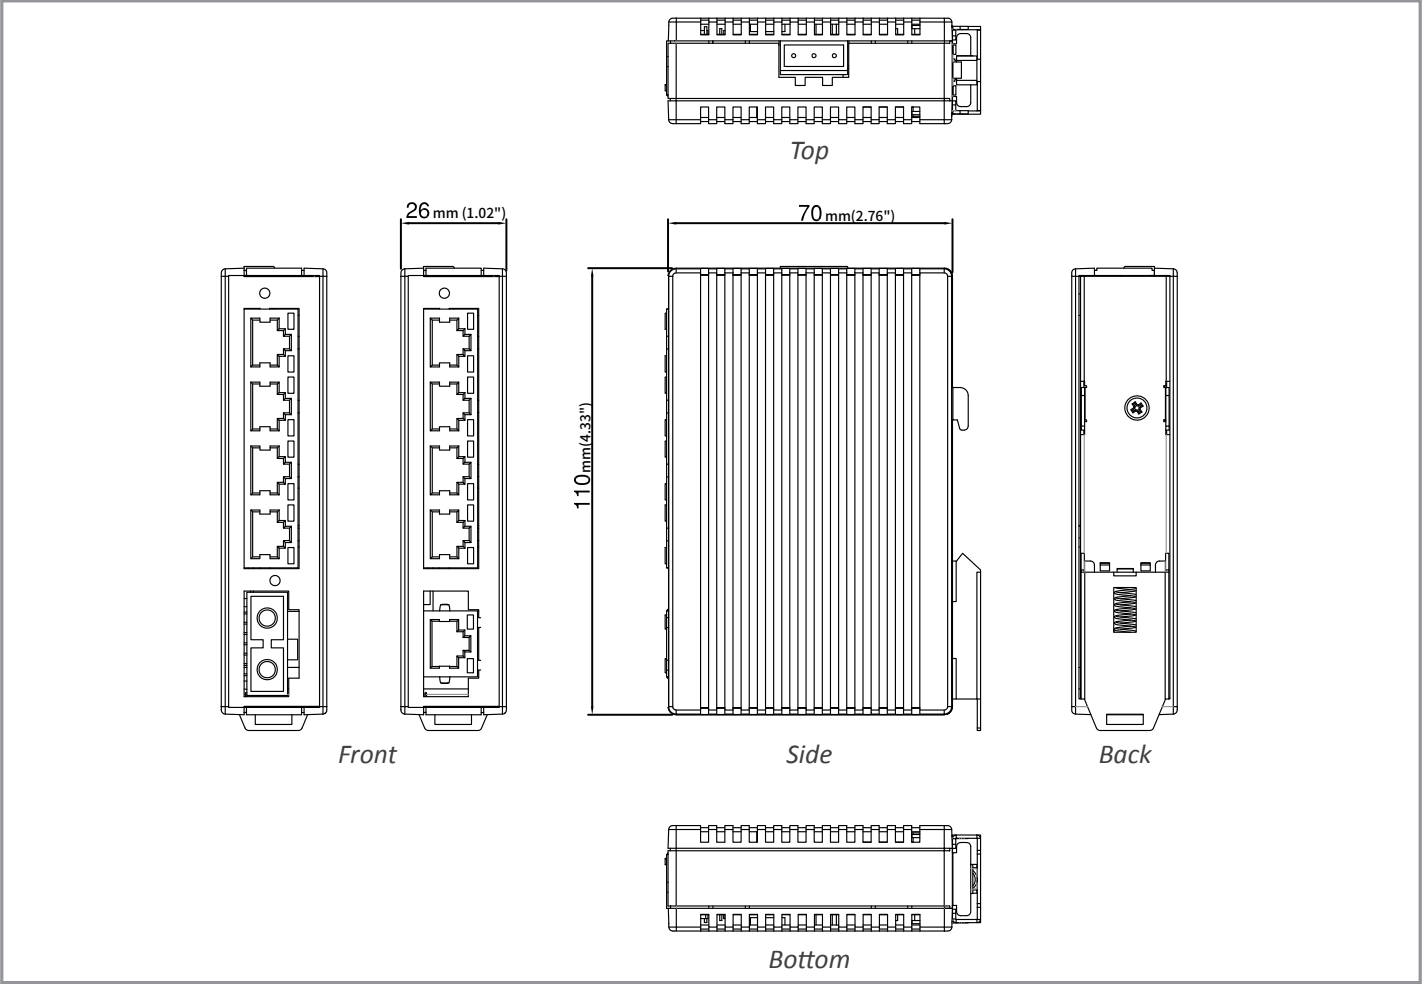

Ordering Information

Model

EX42005-00-1-A	5-port 10/100BASE-TX Industrial Unmanaged Ethernet Switch with 4kV surge protection
EX42014-XY-1-A	4-port 10/100BASE-TX +1-port 100BASE-FX Industrial Unmanaged Ethernet Switch with 4kV surge protection

* DIN-Rail mounting kit included.

100FX Fiber Options (XY)

1A	Multi Mode (SC) - 2Km
1B	Multi Mode (ST) - 2Km
2A	Single Mode (SC) - 20Km
2D	Single Mode (ST) - 20Km
2E	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
2G	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

* More 100FX fiber options also available upon request.

Optional Accessories

HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA