

Motion control


RE 18308-73

Edition: 03.2016

Replaces: 07.2012

VAA-B-SICN-ST-150

05.71.44 - X - 04 - Z

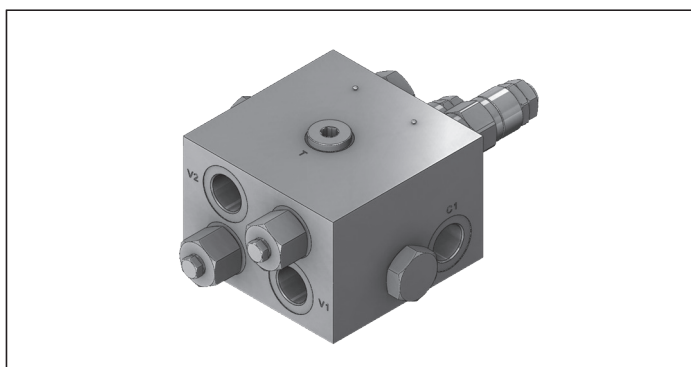


Description

It provides static and dynamic motion control by regulating flow and pressure IN and OUT of the hydraulic motor at ports C1 and C2. When installed close to the motor, it can stop runaway in case of hose failure. The check sections allow free flow into the motor and prevent reverse movement; the pilot assisted relief valves control the movement when pilot pressure is applied. A system of check valves allows cross line relief; an optional make-up port (T) allows to compensate for any volume change.


Technical data

Operating pressure	up to 210 bar (3000 psi)
Max. flow	120 l/min. (32 gpm)
Weight	5.7 kg (12.5 psi)
Manifold material	Aluminium
Note: aluminium bodies are often strong enough for operating pressures exceeding 210 bar (3000 psi), depending from the fatigue life expected in the specific application. If in doubt, consult our Service Network.	
Fluid	Mineral oil (HL, HLP) according DIN 51524
Fluid temperature range	-30 °C to 100 (-22 to 212 °F)
Viscosity range	10 to 500 mm ² /s (cSt)
Recommended degree of fluid contamination	Class 19/17/14 according to ISO 4406
Other technical data	see data sheet 18350-50
Relief setting:	at least 1.3 times the highest expected load.

Note: for applications outside these parameters, please consult us.

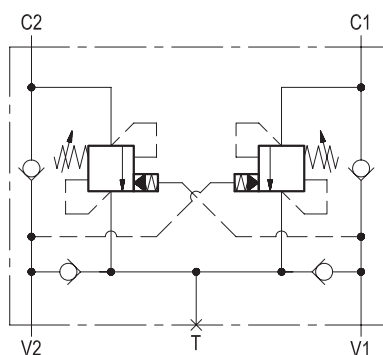

Characteristic curve

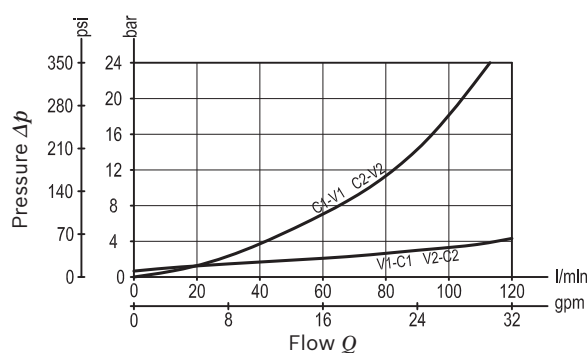

Ordering code

05.71.44	X	04	Z
----------	---	----	---

Motion control

Pilot ratio


03 7.6 :1

10 3:1

Port sizes	V1 - V2	C1 - C2	T
	G 3/4	G 3/4	G 1/2

SPRINGS			
	Adj. pressure range bar (psi)	Pres. increase bar/turn (psi/turn)	Std. setting Q=5 (l/min) bar (psi)
35	100-350 (1450-5000)	105 (1523)	150 (2200)

Tamper resistant cap code
ordering code 03.05.01.001
Mat. no. R930000470



Preferred types

Type	Material number
05714403043500B	R930006932
05714410043500B	R930006955

Type	Material number

Dimensions

