

Cembre HP Ratchet Crimpers



- Suitable for PVC & PA6.6 vinyl insulated terminals & connectors.
- Ratchet control to ensure consistent pressure & emergency release lever.

- Indent-style crimp.
- Automatic handle opening upon completion of the crimping operation.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
HP1	0.2mm ²	2.5mm ²	234.5	73.0	18.3	512
HP3	0.25mm ²	6.0mm ²	234.5	73.0	18.3	498

Cembre MLS Cord End Ferrule Crimpers




- Suitable for both insulated and un-insulated cord end ferrules.
- Trapezoid-shaped crimp.

- Automatic handle opening upon completion of the crimping operation.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
MLS1	0.25mm ²	6.0mm ²	198.0	77.0	18.0	350
MLS2	6.0mm ²	16mm ²	198.0	77.0	18.0	350

Cembre HNKE Ratchet Crimpers

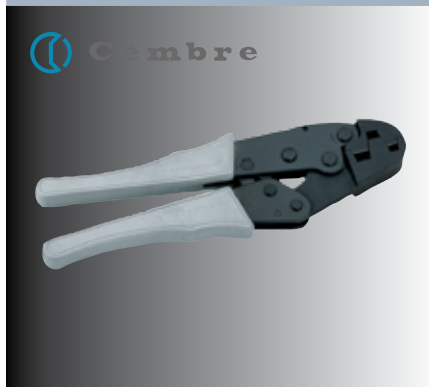

- Suitable for both insulated and un-insulated cord end ferrules.
- Ratchet control to ensure consistent pressure & emergency release lever.

- Trapezoid-shaped crimp.
- Automatic handle opening upon completion of the crimping operation.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
HNKE4	0.5mm ²	4.0mm ²	236.0	73.0	18.3	516
HNKE16	4.0mm ²	16mm ²	236.0	73.0	18.3	491
HNKE50	25mm ²	50mm ²	234.5	73.0	18.3	590

Cembre ND Cord End Ferrule Crimpers



- Suitable for both insulated and un-insulated cord end ferrules.
- Trapezoid-shaped crimp.

- Automatic handle opening upon completion of the crimping operation.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
ND1	0.3mm ²	1.5mm ²	190.0	72.0	21.0	470
ND2	1.0mm ²	6.0mm ²	190.0	72.0	21.0	470
ND3	6.0mm ²	16mm ²	190.0	72.0	21.0	470
ND4	0.5mm ²	4.0mm ²	190.0	72.0	21.0	470

Cembre HN Ratchet Crimpers



- Suitable for UN-insulated terminals & connectors.
- Ratchet control to ensure consistent pressure & emergency release lever.
- Indent-style crimp.
- Automatic handle opening upon completion of the crimping operation.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
HN1	0.25mm ²	10mm ²	234.5	73.0	18.3	480
HN5	10mm ²	16mm ²	234.5	73.0	18.3	489

Cembre HN-A25 Ratchet Crimpers



- Suitable for UN-insulated terminals & connectors.
- Ratchet control to ensure consistent pressure & emergency release lever.
- Indent-style crimp.
- Automatic handle opening upon completion of the crimping operation.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
HN-A25	10mm ²	25mm ²	229.0	78.6	18.3	500

Klauke Mechanical Crimpers



- Suitable for un-insulated Klauke terminals.
- Revolving die, hexagon-style crimp.
- Cross-section marked on terminal barrel during the crimping process.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
K05	6.0mm ²	50mm ²	390.0	140.0	40.0	1100
K08	16mm ²	95mm ²	530.0	120.0	40.0	1800
K06	10mm ²	120mm ²	650.0	120.0	40.0	2900
K09	25mm ²	150mm ²	650.0	120.0	40.0	2900

Klauke Ratchet Crimpers



- Ratchet version, effort-saving and ensures consistent crimp results.
- Suitable for un-insulated Klauke terminals.
- Revolving die, hexagon-style crimp.
- Cross-section marked on terminal barrel during the crimping process.

Order Reference	Conductor Minimum	Conductor Maximum	Length	Width	Height	Weight grams
K05SP	6.0mm ²	50mm ²	390.0	140.0	40.0	1100
K08SP	16mm ²	95mm ²	530.0	120.0	40.0	1800
K06SP	10mm ²	120mm ²	650.0	120.0	40.0	2900
K09SP	25mm ²	150mm ²	650.0	120.0	40.0	2900