


Base Mounting Switches

sälzer

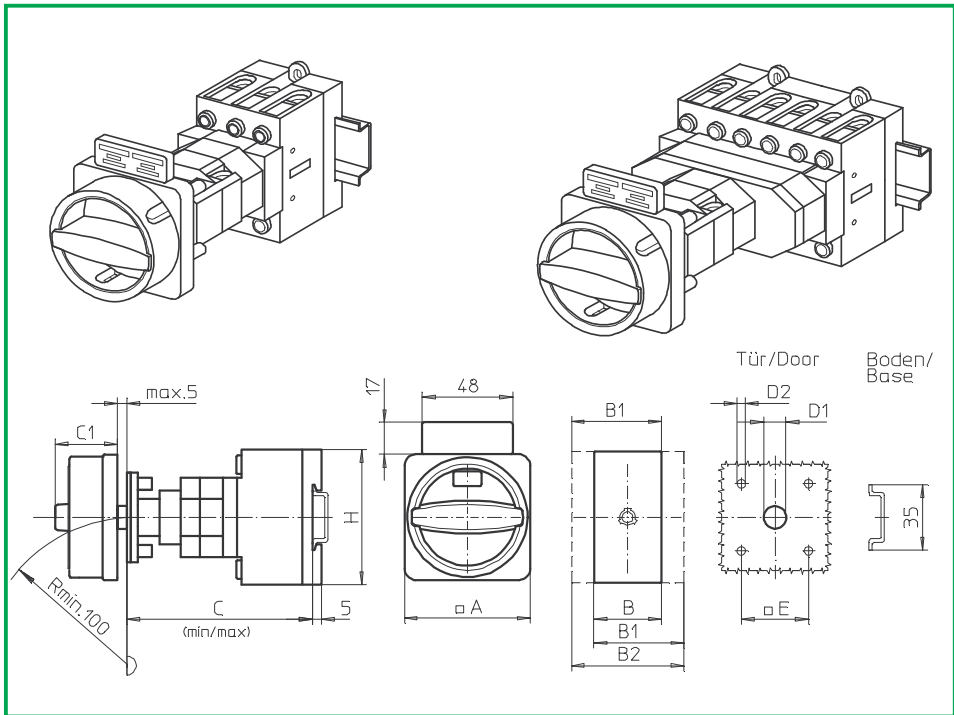

Product lines
B200-A/ -D

Base mounting switch

Door interlock

Modular shaft extension
N/PE connection link

Four hole mounting

36 x 36 mm front

534N1 (IP66)

534N4 (IP66)

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number					
			Operational current I _e	Operational power at 380–440 V							
				AC-21A A	AC-23A kW		AC-3 kW				
Main Switches OFF position padlockable 09h	3 ... 8	B200-A/ -D	50 63	18,5 22	15 18,5	B250 - 41 ... - 534N1 B263 - 41 ... - 534N1					
Main/Emergency-Off Switches OFF position padlockable 09h	3 ... 8	B200-A/ -D	50 63	18,5 22	15 18,5	B250 - 41 ... - 534N4 B263 - 41 ... - 534N4					
SMD modules for basic switch A02											
Mounting form module for 534N.			B200-A/ -D			BFA2 - 534					
N-padlock device 67 x 67 mm, mounting form 534N1 Escutcheon black, padlockable handle black						2CN1					
N-padlock device 67 x 67 mm, mounting form 534N4 Escutcheon yellow, padlockable handle red						2CN4					
Additional top escutcheon plate						FAZ2 - 8041					
Dimensions (mm)											
Product lines	A	B	B1	B2	C _{min}	C _{max}	C1	D1	D2	E	H
B200-A	67	50	69	88	92	107	33	15	4,5	36	72
B200-D	67	100	119	138	104	119	33	15	4,5	36	72
N/PE connection link for terminal capacities with max. 16 mm ² . Modular shaft extensions see page B4-11.											