

PU-01N

Pressure Transmitter for OEM Applications



Features

/ Compact design

/ Integrated amplifier

/ Affordable price to performance ratio

/ Broad-based media compatibility

Description:

The PU-01N series of pressure measuring transmitters belongs to the top-class products among pressure sensors which are ideally suited for OEM applications considering their attractive price levels. In PU-01N, the close-lying pressure is measured, depending on the pressure range, by means of a piezo-resistive or a thin-film sensor element. The pressure-dependent resistance signal output by this sensor element is converted into a power or voltage signal through an amplifier. Alternatively, a power signal of 4...20 mA in 2-wire method or a voltage signal of 0...10 VDC in 3-wire method can be delivered from the transmitter. Other types of output signals are available on request.


Application:

The PU-01N series of pressure measuring transmitters is always used for measuring pressure in fluid or gaseous media, if the process does not demand absolute accuracy but a fair repeatability is sufficient for it. All wetted parts are made of stainless steel in order to cover a wide range of media. In case of particularly difficult media, we recommend mounting the PU-01N along side a diaphragm seal (most used types on request). The high overload capacity of the devices, their resistance from corrosion, mechanical vibrations, mechanical shocks and temperature and their durable stability are highly valued for use in the entire industry.

Technical Specifications:

Process connection /	G1/4" B male
Wetted Parts /	stainless steel 316L (from 10 bar rel. st. steel 316 and 13-8PH)
max. Pressure /	overrange limit [bar]: 2-times operating range end value
max. Media temp. /	-30. . +100°C
max. Ambient temp. /	-30. . +100°C
max. Storage temp. /	-40. . +100°C
Compensated range /	0. . 80°C
Housing /	stainless steel 316L
Weight /	approx. 0.08 kg
Non linearity /	≤ 0.5% of span according to IEC 61298-2
Non repeatability /	≤ 0.2% of span
Set time /	≤ 4 ms within 10. . 90% of span
Temperature factor /	≤ ±1% typ., ≤ ±2.5% max. in range 0. . +80°C

Dimensions in mm:

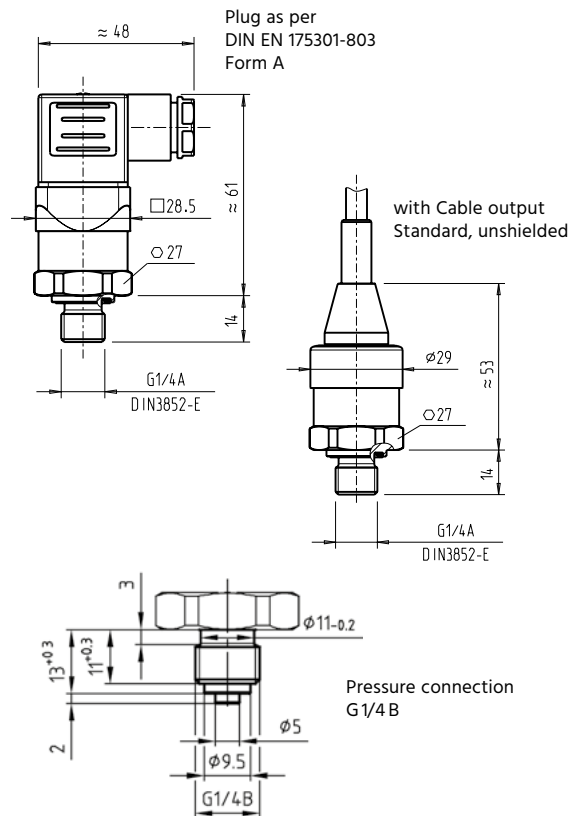


Electrical Specifications:

Output /	4. . 20 mA (2-wire) current output, load ≤ (U _B -8V) / 0,02A DC 0. . 10V (3-wire) voltage output, load, max. Output signal / 1 mA
Power supply /	8. . 30 VDC for (2-wire) 14. . 30 VDC for (3-wire)
max. Current consumption /	current: 25 mA, voltage: 8 mA
CE-Conformity /	2004/108/EWG interference emission and interference resistance to EN 61326 interference emission limit class B 97/23/EG pressure gauge code
Protection class /	IP65 EN 60529/IEC 529
Electrical protection /	protection against polarity reversal, excess voltage and short-circuiting. No polarity reversal protection for ratio- metric output.

Wiring Diagram:

Angled plug DIN 175301-803 A /



	2-wire	3-wire
U_B (Supply +)	1	1
0V (Supply -)	2	2
S+ Analogue output	-	3

Cable output, unshielded /



	2-wire	3-wire
U_B (Supply +)	brown	brown
0V (Supply -)	blue	blue
S+ Analogue output	-	black



Ordering Codes:

Order number	PU-01N.	2.	2.	1.	G
PU-01N Pressure Transmitter					
Output signal / 1 = 4...20 mA, 2-wire 2 = 0...10 VDC, 3-wire					
Calibration / 1 = relative pressure 2 = absolute pressure (only up to operating range H)					
Electrical Connection / 1 = plug connection 2 = with permanent fixed connecting cable (2m)					
Operating range / A = 0...1 bar B = 0...1.6 bar C = 0...2.5 bar D = 0...4 bar E = 0...6 bar F = 0...10 bar G = 0...16 bar H = 0...25 bar I = 0...40 bar J = 0...60 bar K = 0...100 bar L = 0...160 bar M = 0...250 bar N = 0...400 bar O = 0...600 bar					