



## DMT152 Dew Point Transmitter

For Low Dew Point Measurement in OEM Applications



### Features

- Vaisala DRYCAP® technology with a polymer sensor
- Measures dew point down to  $-80\text{ }^{\circ}\text{C}$  ( $-112\text{ }^{\circ}\text{F}$ )
- Withstands condensation
- Traceable calibration (certificate included)
- Applications: dry chambers, dry gases, semiconductor manufacturing, research and testing, and compressed air

Vaisala DRYCAP® Dew Point Transmitter DMT152 is designed for measuring low dew point in OEM applications, even down to  $-80\text{ }^{\circ}\text{C}$  ( $-112\text{ }^{\circ}\text{F}$ ). The excellent long-term stability and reliability of its performance is based on the latest DRYCAP polymer sensor technology.

### Low Maintenance

The DMT152 mechanics have been designed for harsh environments requiring protection against dust, dirt, and splashed water. The DRYCAP technology has a low maintenance need due to its excellent long-term stability and durability against condensation.

### Applications

The DMT152 is an ideal choice for industrial applications where it is necessary to control very low humidity. Most typical areas of use are air and plastics dryers, dry chambers, dry gases, and high-voltage circuit breakers.

The DMT152 measures accurately and reliably also in the challenging combination of low humidity and hot air, which is typical in plastics drying.

### Benefits


- Accurate
- Compact
- Fast response time
- Reduced maintenance costs due to long calibration interval

# Technical Data

## Measurement Performance

Sensor	Vaisala DRYCAP® 180U Thin-film capacitive polymer sensor
Recommended calibration interval	2 years
<b>Dew Point Temperature <sup>1)</sup></b>	
Measurement range	-80 ... -20 °C (-112 ... -4 °F) T <sub>d</sub>
Accuracy	
-80 ... -40 °C (-112 ... -40 °F)	±2 °C (3.6 °F) T <sub>d</sub>
-40 ... -20 °C (-40 ... -4 °F)	±3 °C (5.4 °F) T <sub>d</sub>
Non-calibrated range	-100 ... +20 °C (-148 ... +68 °F) T <sub>d</sub>
Typical response time 63 % [90 %] at a gas temperature of +20 °C (+68 °F) and pressure of 1 bar:	
-20 ... -80 °C T <sub>d</sub>	0.5 min [7.5 min]
-80 ... -20 °C T <sub>d</sub>	2 s [5 s]
Typical long-term stability	Better than 2 °C (3.6 °F) / year
<b>Concentration by Volume (ppm)</b>	
Measurement range (typical)	0 ... 500 ppm
Accuracy at +20 °C (+68 °F), 1013 mbar	±(0.2 ppm + 20 % of reading)

<sup>1)</sup> When the dew point is below 0 °C, the transmitter outputs frost point for T<sub>d</sub>.

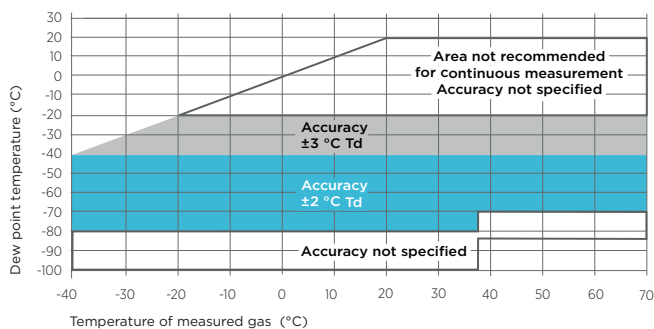

## Accuracy Over Temperature Range

## Inputs and Outputs

Two analog outputs (scalable)	4 ... 20 mA, 0 ... 20 mA (3-wire) 0 ... 5 V, 0 ... 10 V
Digital output	RS-485 (2-wire)
Alarm-level indication by analog signal	User selectable
Purge information	5 V, 10 V, 20 mA, or LED
Accuracy of analog outputs	±0.01 V / ±0.01 mA
<b>Operating Voltage</b>	
RS-485 output	11 ... 28 VDC <sup>1)</sup>
Voltage output	15 ... 28 VDC <sup>1)</sup>
Current output	21 ... 28 VDC
<b>Supply Current</b>	
Normal measurement	20 mA + load current
During self-diagnostics	Max. 220 mA pulsed
Supply voltage fluctuation	Max. 0.3 V
<b>External Load</b>	
Voltage output	Min. 10 kΩ
Current output	Max. 500 Ω

<sup>1)</sup> For extended temp. down to -40 °C (-40 °F) or pressure up to 50 bar (725 psia), the supply voltage is 21 ... 28 VDC.

## Operating Environment

Temperature	-40 ... +70 °C (-40 ... +158 °F)
Relative humidity	0 ... 100 %RH (up to +20 °C / +68 °F)
Pressure	0 ... 50 bar (725 psia)
Measurement environment	For air, nitrogen, argon, helium, and oxygen <sup>1)</sup> Not suitable for measurements in hydrogen or pure carbon dioxide
Sample flow rate	No effect on measurement accuracy
EMC compliance	EN61326-1, Industrial environment


<sup>1)</sup> Consult Vaisala if other chemicals are present. Consider safety regulations with flammable gases.

## Mechanical Specifications

Housing material (wetted parts)	AISI316L
Stainless steel mesh filter	Filter body AISI303, mesh AISI316L, grade 18 μm
Mechanical connections	ISO G1/2", NPT 1/2", UNF 3/4"-16", UNF 5/8"-18"
IP rating	IP66
Storage temperature range	-40 ... +80 °C (-40 ... +176 °F)
Weight (ISO G1/2")	190 g (6.70 oz)

## Accessories

Connection cable for MI70 handheld indicator	219980
USB cable for PC connection	219690
Loop-powered external display (Nokeval 301)	226476
Loop-powered external display with relays (Nokeval 302)	234759
NW40 flange	225220SP
<b>Sampling Cells (Available for ISO G1/2")</b>	
Basic sampling cell	DMT242SC
With Swagelok 1/4" male connectors	DMT242SC2
With a quick connector and leak screw	DSC74
Two-pressure sampling cell	DSC74B

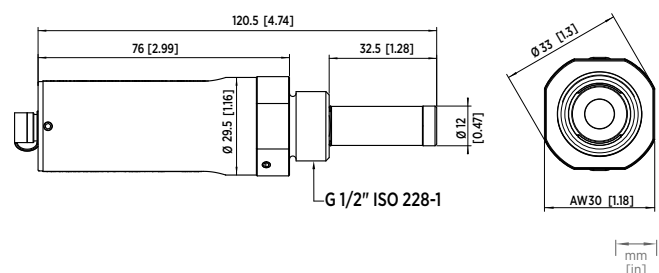

DMT152 Dimensions



**VAISALA**

Published by Vaisala | B210750EN-M © Vaisala Oyj 2020

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications — technical included — are subject to change without notice.