


# 1200 SR2 series

## TECHNICAL FEATURES

REFERENCE	1200 SR2K : nickel plated steel 1200 SR2I : stainless steel
DIMENSIONS	SR2 1/4" to 1 1/2"
MATERIAL	1200 SR2K : nickel plated steel 1200 SR2I : stainless steel 316 L
THREAD	Male and female in BSP thread, right-hand connection, option BSPP
PRESSURE	Maximum 350 bar except stainless steel (see table)
TEMPERATURE	150° C maximum
ROTATION	Swiveling motion
APPLICATION	High pressure hose connection with jacks. Hydraulic control.
OBSERVATIONS	Hydraulically balanced for easy rotation
CONNECTION	With hoses or articulated hoses
USE	Oil, air, gas, chemicals (SR2I), for water 1200 SR2K

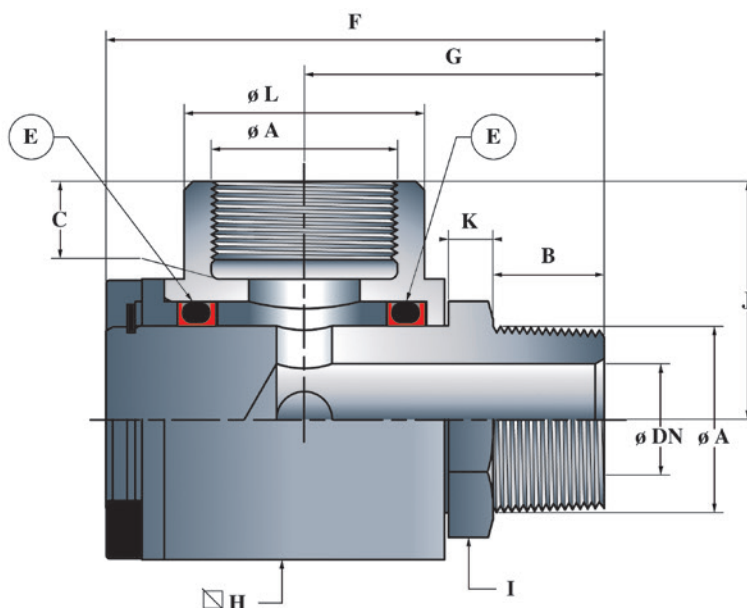

## 1200 SR2K - I

Full Nominal Diameter

Ref.		1213 SR2 K /I	1217 SR2 K /I	1221 SR2 K /I	1227 SR2 K /I	1234 SR2 K /I	1242 SR2 K /I	1249 SR2 K /I
Dimensions	A	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2
	B	14	15	18	22	25	30	30
	C	12	14	15	20	22	31	30
	DN	Ø 7	Ø 10	Ø 13	Ø 18	Ø 24	Ø 30	Ø 38
	E	GR 817SRV	GR 821SRV	GR 827SRV	GR 834SRV	GR 849SRV	GR 849SRV	GR 860SRV
	F	57	63,5	78	91,5	112	136,5	159
	G	34	39	46	55,5	67	79,5	92
	H	⌀ 30	⌀ 35	⌀ 40	⌀ 50	⌀ 63	⌀ 82	⌀ 96
	I	22 /Flat	24 /Flat	30 /Flat	41 /Flat	46 /Flat	55 /Flat	70 /Flat
	J	26	30	35	45	53,5	67	77
	K	6	7,5	8	8,5	10	9,5	12
	L	26	30	38	45	54	70	95
Max. Pressure K/I		350/175	350/175	300/150	300/150	250/125	250/125	200/100